




WPG275*8

DIESEL GENERATING SET

GENERATING SET RATINGS 50Hz – 1500rpm @ 0.8p.f.

Voltage	PRP		ESP		
	V	kVA	kWe	kVA	kWe
415/240	250	200	275	220	
400/230	250	200	275	220	
380/220	250	200	275	220	

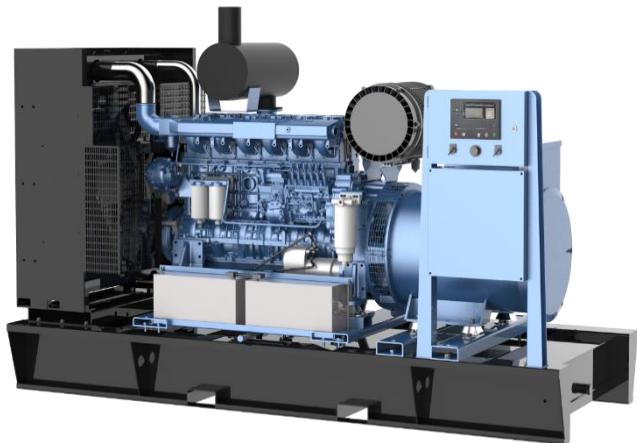

PRODUCT FEATURES

Engine

- Cast iron frame style body structure
- One-piece forged crankshaft
- Separate cast iron cylinder heads and replaceable dry cylinder liners
- Aluminum alloy pistons with oil cooling gallery

Cooling system

- Radiator and hoses supplied separately
- Thermostatically-controlled system with belt driven coolant pump and pusher fan

Fuel system

- P type fuel injection pump and injector for higher inject pressure
- Duplex fine filter and water separation filter assembly with transparent cup for better efficiency

Lubrication system

- Flat bottom large capacity oil pan
- Spin-on full-flow lube oil filter
- High capacity gear driven lube oil pump

Electrical system

- 24 Vdc electric starter motor and battery charging alternator
- LOP + HWT sensors

Air intake and exhaust system

- Mid-position and below inlet turbocharger optimized or genset application
- Special rear mounted air filter with restriction indicator
- Exhaust manifold shield for heat isolating

Alternator

- Brushless, 4 Pole, IP23 drip-proof revolving field design
- Class H insulation and Class H temperature rise
- Low reactance with 2/3 pitch windings on the stator
- Direct-coupled by flexible disc
- Sustained overcurrent >300% in 10 sec
- Direct drive centrifugal blower fan cooling

Control module

- DSE control module is ideal for a wide control range to manage, monitor, and diagnose quickly and easily.
- Display status message Provide protection Auto shutdown at fault detection



GENERATING SET SPECIFICATIONS

Governor and regulation class	In accordance to ISO 8528-5 Class G2 performance
Phase number and connection	3 phase, 4 wires, Y-type
Cooling method	Closed looped water-cooled
Starting method	DC 24V Electric starter
Steady-state voltage deviation	$\leq \pm 2.5\%$
Steady-state frequency band	$\leq 1.5\%$

ENGINE

Brand / Model	Weichai / WP10D264E200	
Gross Power	kWm ESP - 264 / PRP - 240	
Cylinder / Type / Aspiration	6 / In-line / Turbocharged and Aftercooled	
Bore x Stroke	mm	126 x 130
Displacement	L	9.726
Compression ratio		17:1
Brake Mean Effective Pressure	kPa	ESP – 2171

COOLING SYSTEM

Type of Coolant	Liquid (water + 50% antifreeze)	
Total Cooling System Capacity (with Radiator)	L	35
Max coolant temperature – shutdown	°C	105
Cooling Fan Airflow	m³/min	415

LUBRICATION SYSTEM

Operating Temperature range before Engine	°C	78 -105
Oil fuel consumption ratio based on engine fuel consumption data	g/kW.hr	$\leq 0.2\%$
Total system capacity (including filters)	L	30
Type of oil filter		Spin-on full flow filter



FUEL SYSTEM

Type of fuel filter	Spin-on fuel filter	
Min. internal diameter of the supply pipe	mm	12
Min. internal diameter of the return pipe	mm	12
Max. fuel return restriction	Bar	0.5
Max. fuel inlet temperature	°C	50
Fuel supply flow	L/hr	169
Fuel Consumption (Tolerance +3%)		
Rating	gr/kWh	L/hr
100%ESP	201.6	63.4
100%PRP	199.1	56.9
75% PRP	197	42.2
50% PRP	198.3	28.3
25% PRP	215.5	15.4

EXHAUST SYSTEM

Exhaust Gas temperature after the turbocharger	°C	600
Exhaust Gas flow	m³/min	ESP – 50.6 / PRP – 46.8
Max. Exhaust back pressure	mBar	60

ALTERNATOR

Brand / Model	WEICHAI / WHA-250-4/0.4	LEROY-SOMER / TAL-A46-D
Rated Current	361A	361A
Coupling / No. of Bearing	Direct / Single	Direct / Single
Winding Pitch	2/3	2/3
Type of Excitation	Self-excitation	Self-excitation
Cooling type	Air	Air
Voltage regulation method	AVR	AVR
Insurance	Class H	Class H
Temperature rise	Class H	Class H
Protection Grade	IP23	IP23
Efficiency at 0.8p.f. @ 100% load	92.7%	91.3%

CONTROL MODULE

Back-lit LCD display
3 Phase generator and 3 Phase Mains monitoring
Monitoring speed, frequency, voltage, current, oil pressure, coolant temperature and fuel level
Display warning, shutdown and engine status information
Hours counter provides accurate information for monitoring and maintenance.





STANDARD CONDITIONS

Standard operating environment: ambient temperature is 5°C~40°C, the altitude is less than 1000m, the relative humidity is less than 90%(25°C), and there is no dust, sand dust, salt fog, mold, condensation environment, etc.

If the operating environment exceeds the above requirements, please contact the factory and consult.

Ambient adaptability protection measures for alternators

Ambient type	Ambient description	Measures of protection
General Ambient	The air is clean and dry, the humidity is ≤90%, and the distance from the coastline is ≥ 30km; Non-industrial ambient (chemical splash, acid-base steam, corrosive environment, etc.)	standard configuration
Humid Ambient	The humidity above 90% or condensation occurs	Anti-condensation heating
Salt spray Ambient	Salt fog crystals are produced in seaside (< 30km from the coastline) or island Ambient	Anti-condensation heating; Spray three-proof paint on winding surface; Spraying epoxy protection for parts and structures.
Dust Ambient	The ambient where mining, building construction, desert Gobi or sandstorm occur	Improve the protection level of the alternator to IP44; Install filters.

If you need to use protective measures beyond the standard, please contact the factory and consult.

Special working condition

If the operating conditions of the generator meet the following conditions, please contact the factory and consult.

- Multistage parallel operation
- Grid-connected operation
- As the main power supply, it runs continuously for a long time
- The load includes a high power motor type load
- Capacitive load
- Special ambient such as high temperature, cold and plateau



Ratings definitions


Emergency Standby Power (ESP):

Emergency Standby Power is the maximum power available for a varying load for the duration of a main power network failure. The average load factor over 24 hours of operation should not exceed 70% of the engine's ESP power rating.

Typical operational hours of the engine are 200 hours per year, with a maximum usage of 500 hours per year. This includes an annual maximum of 25 hours per year at the ESP power rating. No overload capability is allowed. The engine is not to be used for sustained utility paralleling applications.

Prime power (PRP):

Prime Power is the maximum power available for unlimited hours of usage in a variable load application. The average load factor should not exceed 70% of the engine's PRP power rating during any 24 hour period. An overload capability of 10% is available; however, this is limited to 1 hour within every 12 hour period.

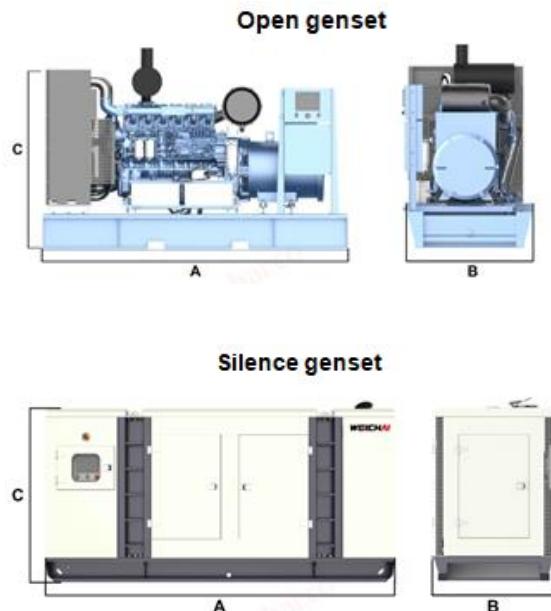

This outline drawing is to provide representative configuration details for Model series only.
See respective model data sheet for specific model outline drawing number.
Do not use for installation design

Dimension and Weight

Structure	Model	Dim "A" mm	Dim "B" mm	Dim "C" mm	Dry wt.* kg
Open	WPG275F8	2999	1170	1920	2440
Silence	WPG275L8	3900	1350	2050	3160

* Note: Weights represent a set with standard features. See outline drawings for weights of other configurations.

Codes and standards

ISO 9001	This generating set is designed and manufactured in facilities certified to ISO 9001.	ISO 8528	This generating set has been designed to comply with ISO 8528 regulation.
	The CE marking is only valid when equipment is used in a fixed installation application. Material compliance declaration is available upon request.		

For more information contact your local Weichai distributor or visit www.weichai.com



Availability Details

- Air intake system: Air filter;
- Cooling system: Closed-loop cooling radiator;
- Fume extraction system: Expansion pipe, muffler;
- Fuel system: Inlet return port connector, fuel filter;
- Lubrication system: Oil pan, oil filter;
- Vibration damping system: Rubber shock absorber;
- Electrical system: Control screen and switch cabinet;
- Silent System: Silencing box/container (silent unit configuration)

Note 1: Silent generator sets (L Series) can be used directly after installation on the ground, without the need for separate installation accessories, and open generator sets require appropriate installation accessories to install fume extraction systems, etc.

Note 2: The factory does not provide on-site installation accessories such as exhaust straight pipe, elbow, radiator shroud, etc. to the unit itself. The buyer needs to consider the installation of the accessories and the installation project in advance;