
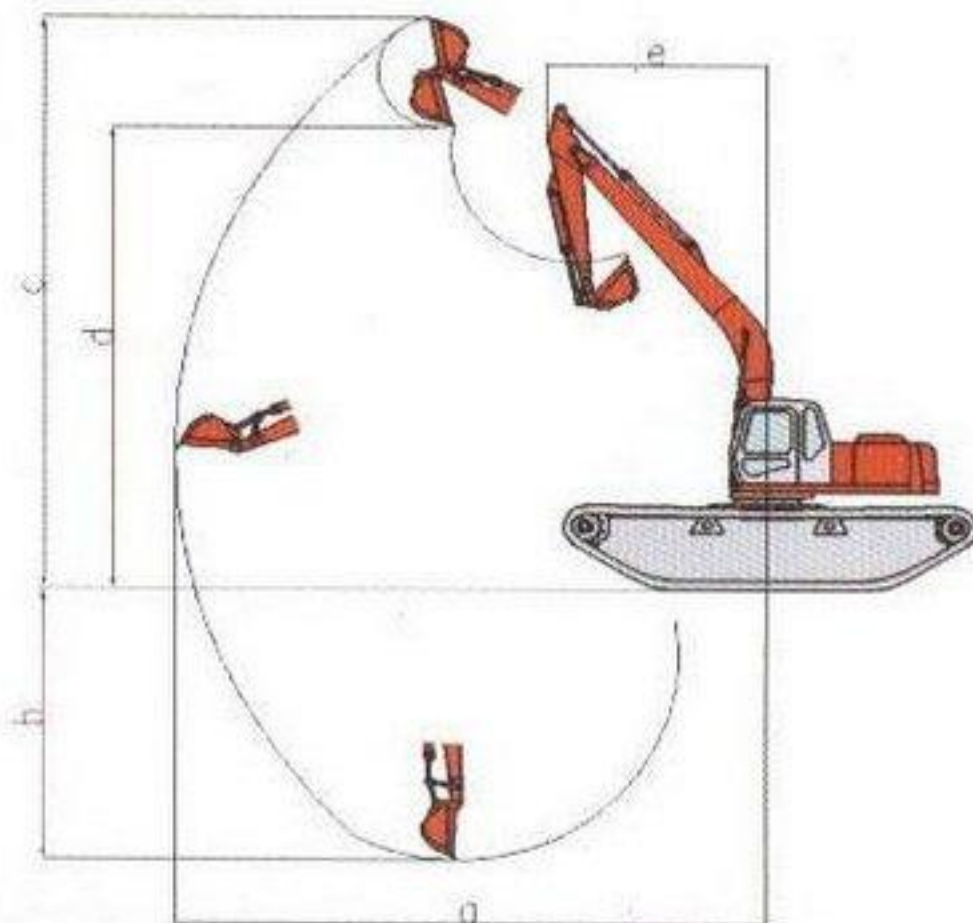
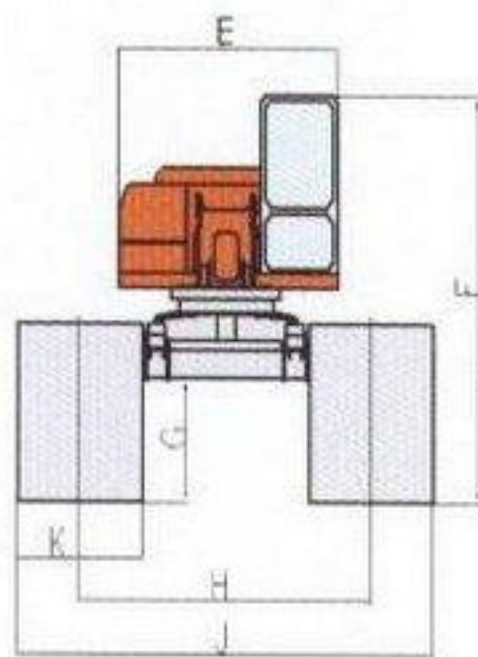


Amphibious Excavator Technical Parameter

www.wme.cn/AmphibiousExcavator/

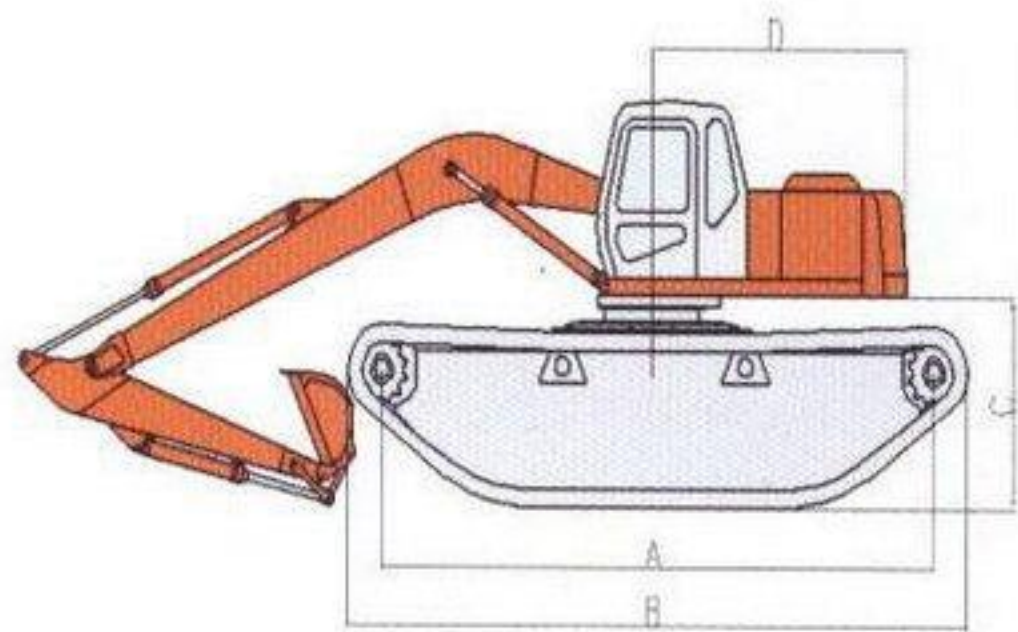

Model		SL160	SL180	SL200	SL220	SL240	
Technical parameter	Bucket capacity (M ³)	0.4	0.5	0.6	0.7	0.8	
	Operating weight (Kg)	15600	18900	19600	22400	24200	
	Rotary speed (rpm)	0~9	0~10.7	0~10.7	0~10.7	0~10.7	
	Speed (Km/h)	Land	0~3	0~4.2	0~4.2	0~3.9	0~3.9
		Marsh	0~2	0~2.3	0~2.3	0~2.3	0~2.3
		Water	0~3	0~1.8	0~1.8	0~1.8	0~1.8
	Gradeability	60%	60%	60%	60%	60%	
	Grounding pressure (Kg/cm ²)	0.162	0.145	0.179	0.164	0.145	
Dredging power (KN)	60	120	120	135	135		
Working scope	Max. dredging reach a (mm)	7290	9835	9835	10050	10150	
	Max. dredging depth b (mm)	3550	4085	4085	5450	5760	
	Max. dredging height c (mm)	8620	12900	12900	10850	10730	
	Max. unloading height d (mm)	6020	9200	9200	8150	7870	
	Min. rotary radius e (mm)	1470	2640	2640	2600	2600	
Figuration sizes	Space of tumblers A (mm)	5470	6500	6900	7600	7600	
	Overall length of track B (mm)	6370	7320	7720	8500	8500	
	Distance from superstructure to ground C (mm)	1430	1720	1870	1740	1740	
	Rear-end swing radius D (mm)	2070	2760	2950	2950	2950	
	Overall width of upperstructure E (mm)	2110	2650	2650	2650	2650	
	Overall height F (mm)	3270	3550	3795	3540	3540	
	Min. distance to ground G (mm)	880	1000	1180	1180	1000	
	Space of tracks H (mm)	2110	2700	2650	3500	3500	
	Overall width J (mm)	3210	4100	4150	5000	5200	
	Width of track shoe K (mm)	1100	1400	1500	1500	1700	