



# CUMMINS

CONFIGURATION  
D193091DX02

ENGINE MODEL: KTA19-G3A

CURVE NUMBER: FR4212

CPL No.: 4153

DATE: 2021/8/18



Displacement: 19L (1150)      Aspiration: Turbocharged ,Aftercooled      RATING  
 BoreXStroke: 159X159mm (6.25X6.25 in.)      Fuel System: Cummins PT      60Hz Standby: 563 kW(755 BHP)@1800 r/min  
 Compress Ratio: 13.9:1      No. of Cylinder: 6      50Hz Standby: 504 kW(675 BHP)@1500 r/min

All data is based on the engine operating with fuel system, water pump, and 20 in. H<sub>2</sub>O(4.98kPa) inlet air restriction with 5.8 in.(147mm) inner diameter, and with 2 in. Hg(7kPa) exhaust restriction with 8 in.(203mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolant as 50% ethylene glycol/50% water. All data is subject to change without notice.

## GROSS ENGINE POWER OUTPUT

SPEED rpm	STANDBY POWER		PRIME POWER		CONTINUOUS POWER	
	BHP	kW	BHP	kW	BHP	kW
1800	755	563	680	507	575	429
1500	675	504	600	448	475	354

## FUEL CONSUMPTION

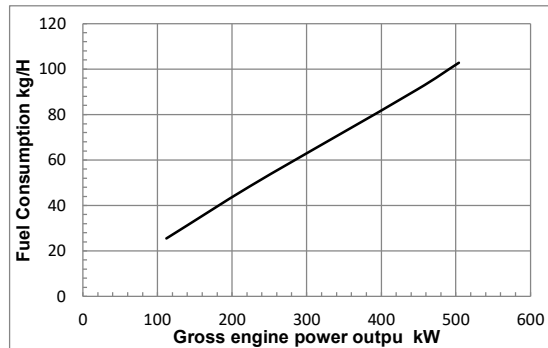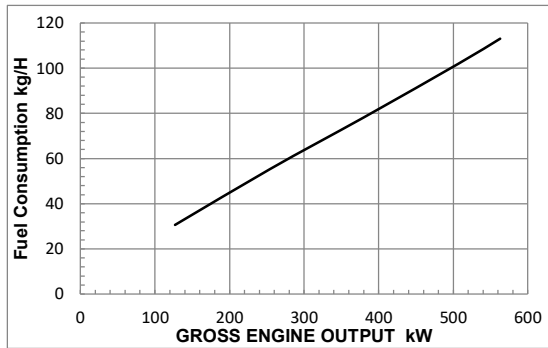

	OUTPUT POWER		CONSUMPTION		BFSC		
	%	BHP	kW	Lb/h	kg/h	g/kW.h	Lb/BHP.h
<b>1800RPM</b>							
STANDBY							
100	755	563	249	113	201	0.330	
PRIME							
100	680	507	225	102	201	0.331	
75	510	380	172	78	206	0.338	
50	340	254	122	55	218	0.358	
25	170	127	67	31	241	0.397	
CONTINUOUS							
100	575	429	190	86	201	0.331	
<b>1500RPM</b>							
STANDBY							
100	675	504	227	103	204	0.336	
PRIME							
100	600	448	201	91	203	0.334	
75	450	336	154	70	207	0.341	
50	300	224	107	48	216	0.356	
25	150	112	56	26	228	0.375	
CONTINUOUS							
100	475	354	157	71	202	0.332	

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in. Hg(100kPa) barometric pressure [300ft.(91m) altitude] 77deg F (25 deg C) inlet temperature, and 0.30 in. Hg(1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2.

TECHNICAL DATA DEPT.

CERTIFIED WITHIN 5%

CHIEF ENGINEER



## POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

**STANDBY POWER RATING** is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an

**CONTINUOUS POWER RATING**

Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

**PRIME POWER RATING** is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

**UNLIMITED TIME RUNNING PRIME POWER**

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

**LIMITED TIME RUNNING PRIME POWER**

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at Prime Power rating should use the Continuous Power rating.

**Reference Standards:**

BS-5514 and DIN-6271 standards are based on ISO-3046.

**Operation At Elevated Temperature And Altitude:**

The engine may be operated at:

1800RPM up to 5,000 ft. (1500m) and 104°F (40°C) without power deration.

1500RPM up to 7,500 ft. (2280m) and 104°F (40°C) without power deration.

For sustained operation above these conditions, derate by 4% per 1,000ft. (300m), and 1% per 10°F (2% per 11°C).





Maximum Allowable Top Tank Temperature (Stand_by/Prime) —°F(°C).....	220/212	(104/100)
Standard Thermostat (modulating) Range— °F(°C).....	180-200	(82-93)
Maximum Coolant Pressure (Exclusive of Pressure Cap) —PSI(kPa).....	15	(103)
Minimum Coolant Makeup Capacity —U.S.Gal(L).....	1.6	(6.1)
Minimum Allowable Fill Rate —U.S.GPM(L/min).....	5	(18.9)
Minimum Allowable Coolant Expansion Space —% of System Capacity.....	5	
Maximum Allowable Deaeration Time —min.....	25	

**LUBRICATION SYSTEM**

Oil Pressure		
@ Idle —PSI(kPa).....	20	(138)
@ Rated Speed —PSI(kPa).....	50-70	(345-483)
Oil Flow at Rated Speed —U.S.GPM(L/min).....	40	(151.4)
Maximum Allowable Oil Temperature —°F(°C).....	250	(121.0)
By-Pass Filter Capacity		
Spin-on Cartridge Type —U.S.Gal(L).....	0.7	(2.6)
Oil Pan Capacity (Option OP4019)		
High —U.S.Gal(L).....	10.0	(37.9)
Low —U.S.Gal(L).....	8.5	(32.2)
Total System Capacity (Including By-Pass Filter) —U.S.Gal(L).....	13.2	(50.0)
Angularly of Standard Oil Pan ( Option OP4019)		
Front Down.....	30°	
Front Up.....	30°	

**FUEL SYSTEM**

Fuel Injection System.....	Cummins PT	
Maximum allowable Restriction to PT Fuel Pump		
With Clean Fuel Filter —in.Hg(kPa).....	4	(13.55)
With Dirty Fuel Filter —in.Hg(kPa).....	9	(30.48)
Maximum Allowable Injector Return Line Restriction		
With Check Valves —in.Hg(kPa).....	6.5	(22.0)
Less Check Valves —in.Hg(kPa).....	2.5	(8.5)
Minimum Allowable Fuel Tank Vent Capability —ft <sup>3</sup> /h (L/h) .....	15	(425)
(With 2.5 in. Hg (63 mm Hg) or Less Back Pressure)		
Starter (Heavy, Anode)—Volt.....		24
Battery Recharge System,Negative ground—A.....		35
Maximum Allowable Resistance of Starting Circuit—Ω.....		0.002
Minimum Recommended Battery Capacity		
·Cold Soak at 50°F(10°C) or Above—0°F CCA.....		600
·Cold Soak at 32~50°F(0~10°C) or Above—0°F CCA.....		640
·Cold Soak at 0~32°F(-18~0°C) or Above—0°F CCA.....		900



**PERFORMANCE DATA**

All data is based on the engine operating with fuel system, water pump, lubricating oil pump, air cleaner, and muffler, not included are alternator, compressor, fan, optional equipment and driven components. Data represents gross engine performance capabilities obtained and corrected in accordance with SAE J1349 conditions for 29.61 in Hg(100 kPa) barometric pressure[300ft. (90 m) altitude], 77°F (25°C) inlet air temperature, and 0.30 in. Hg (1kPa) water vapor pressure with No. 2 diesel fuel or a fuel corresponding to ASTM D2. All data is subject to change without notice.

	STAND_BY		PRIME	
	60 Hz	50 Hz	60 Hz	50 Hz
Engine Speed r/min.....	1800	1500	1800	1500
Idle Speed r/min.....	675-775	675-775	675-775	675-775
Gross Power Output BHP(kW).....	755(563)	675(504)	680(507)	600(448)
Brake Mean Effective Pressure PSI(kPa).....	287(1978)	308(2125)	258(1781)	274(1889)
Piston Speed ft/min(m/s).....	1870(9.5)	1555(7.9)	1870(9.5)	1555(7.9)
Friction Horsepower BHP(kW).....	83(62)	54(40)	83(62)	54(40)
Intake Air FlowCFM( L/s).....	1517(716)	1226(579)	1455(687)	1126(531)
Exhaust Gas Flow CFM( L/s).....	3945(1862)	3398(1604)	3673(1734)	3039(1434)
Exhaust Gas Temperature °F(°C).....	939(504)	1034(557)	898(481)	1000(538)
Heat Rejection to Ambient BTU/min(kW).....	4522(80)	4108(72)	4050(71)	3645(64)
Heat Rejection to Coolant BTU/min(kW).....	22830(401)	20530(361)	20824(366)	18125(319)
Engine Water Flow L/s(U.S.GPM) @ 3psi.....	196(12.4)	162(10.2)	196(12.4)	162(10.2)