


# GT600



## SPECIFICATION




ITEM	GT600
Type	OHV, 4 Stroke, Air cooled
Bore×Stroke	68×50 mm
Displacement	181 cm <sup>3</sup>
Continuous Rated Output	3.3/3600 kW/rpm <4.5/3600 PS/rpm>
Maximum Output	4.4 kW <6.0 PS>
Maximum Torque	11.6/2800 N·m/rpm <1.18/2800 kgf·m/rpm>
Fuel	Unleaded Automobile Gasoline
Fuel Tank Capacity	3.8 L
Lubricating Oil	Engine Oil SD Class or Higher
Lubricating Oil Capacity	0.6 L
Starting System	Manul Starter[or Electric Starter]
Ignition System	Breakerless Ignition Type
Air Cleaner	Polyurethane Type [ or Oil Bath type]
Governor System	All Speed Mechanical Governor
PTO Shaft Rotation	Counter-Clockwise [facing PTO]
Weight	14.9(PN) 15.8(LN) kilograms
Dimensions	L: 317.5 mm W:354.5 mm H: 353 mm

## PERFORMANCE CURVE

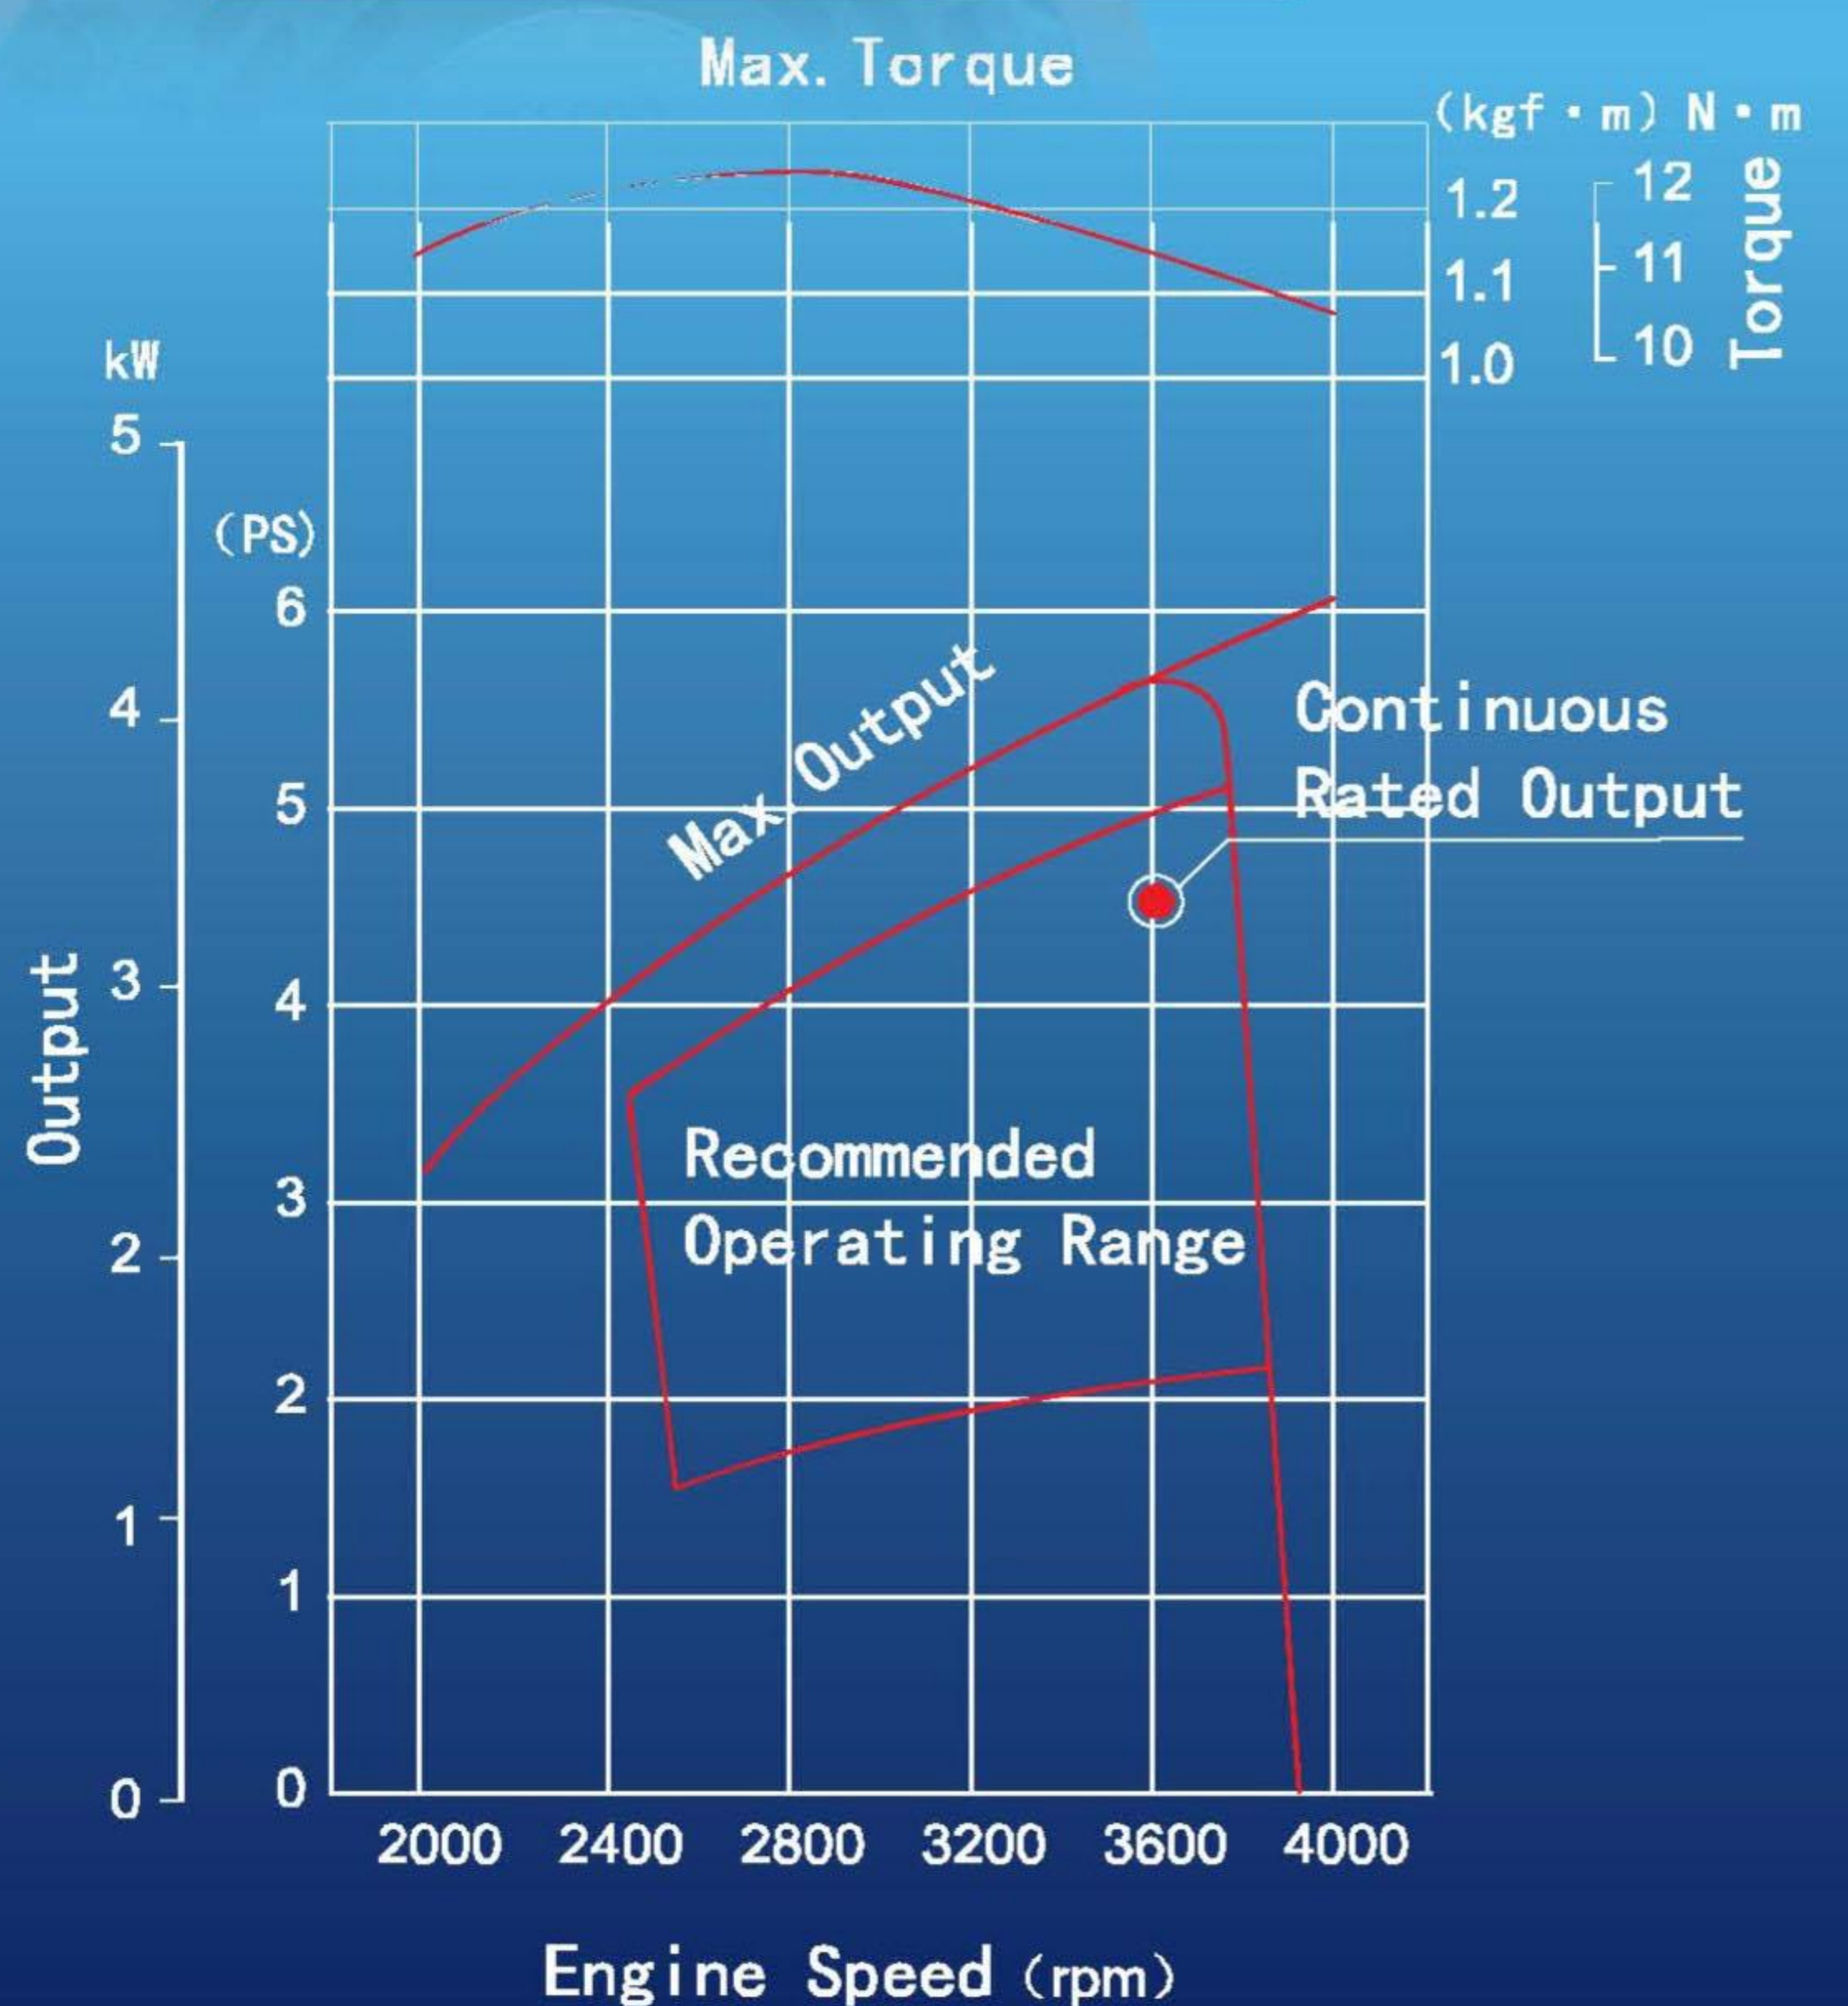



# DIMENSIONS

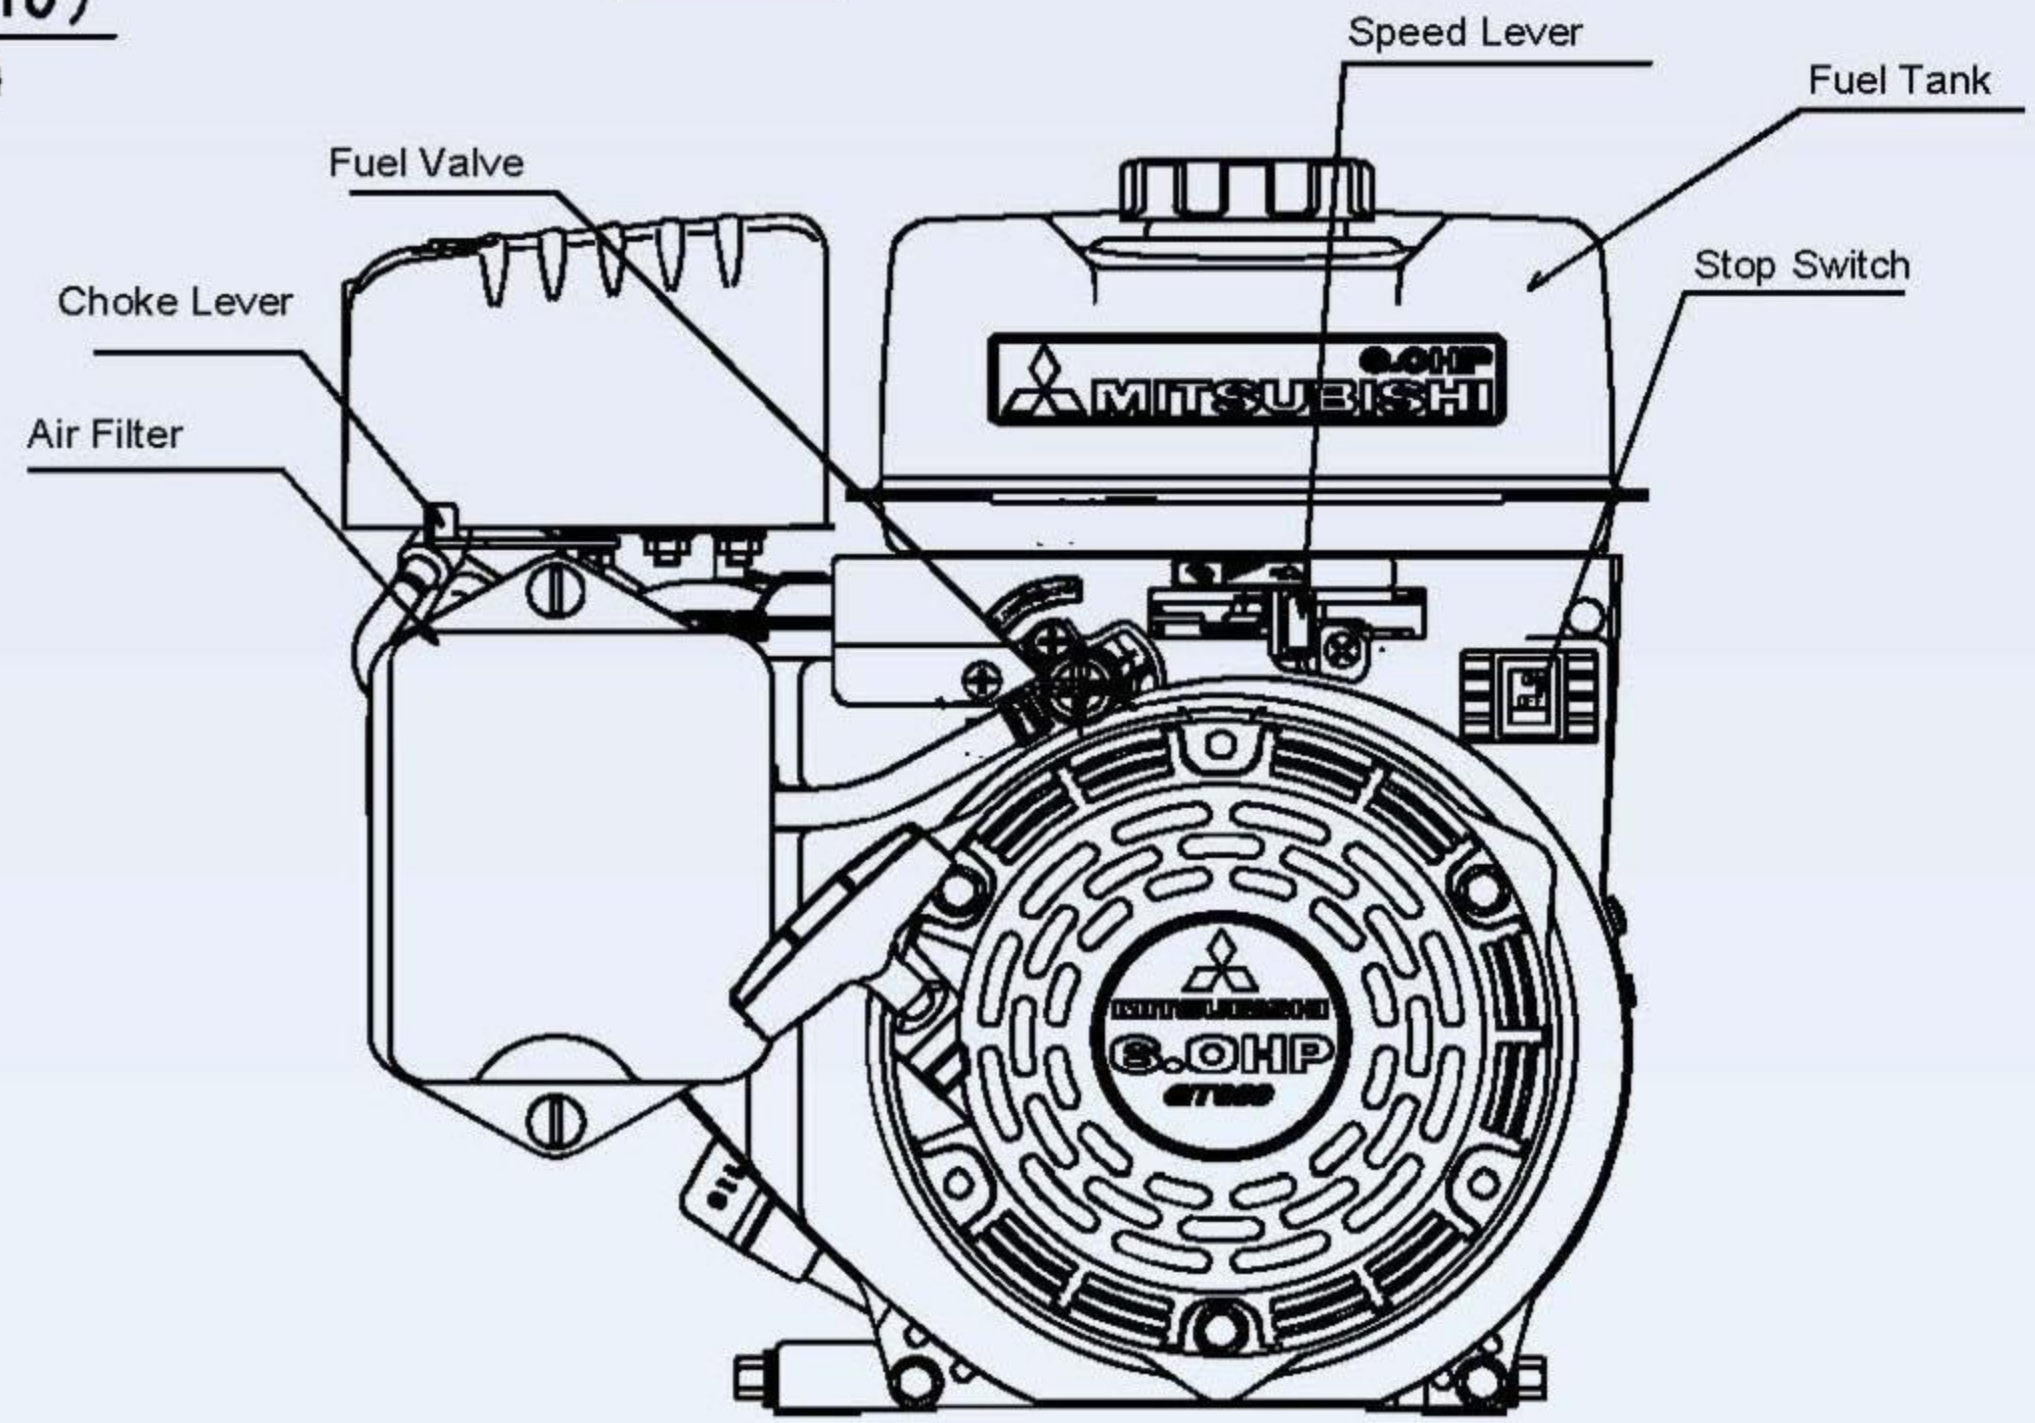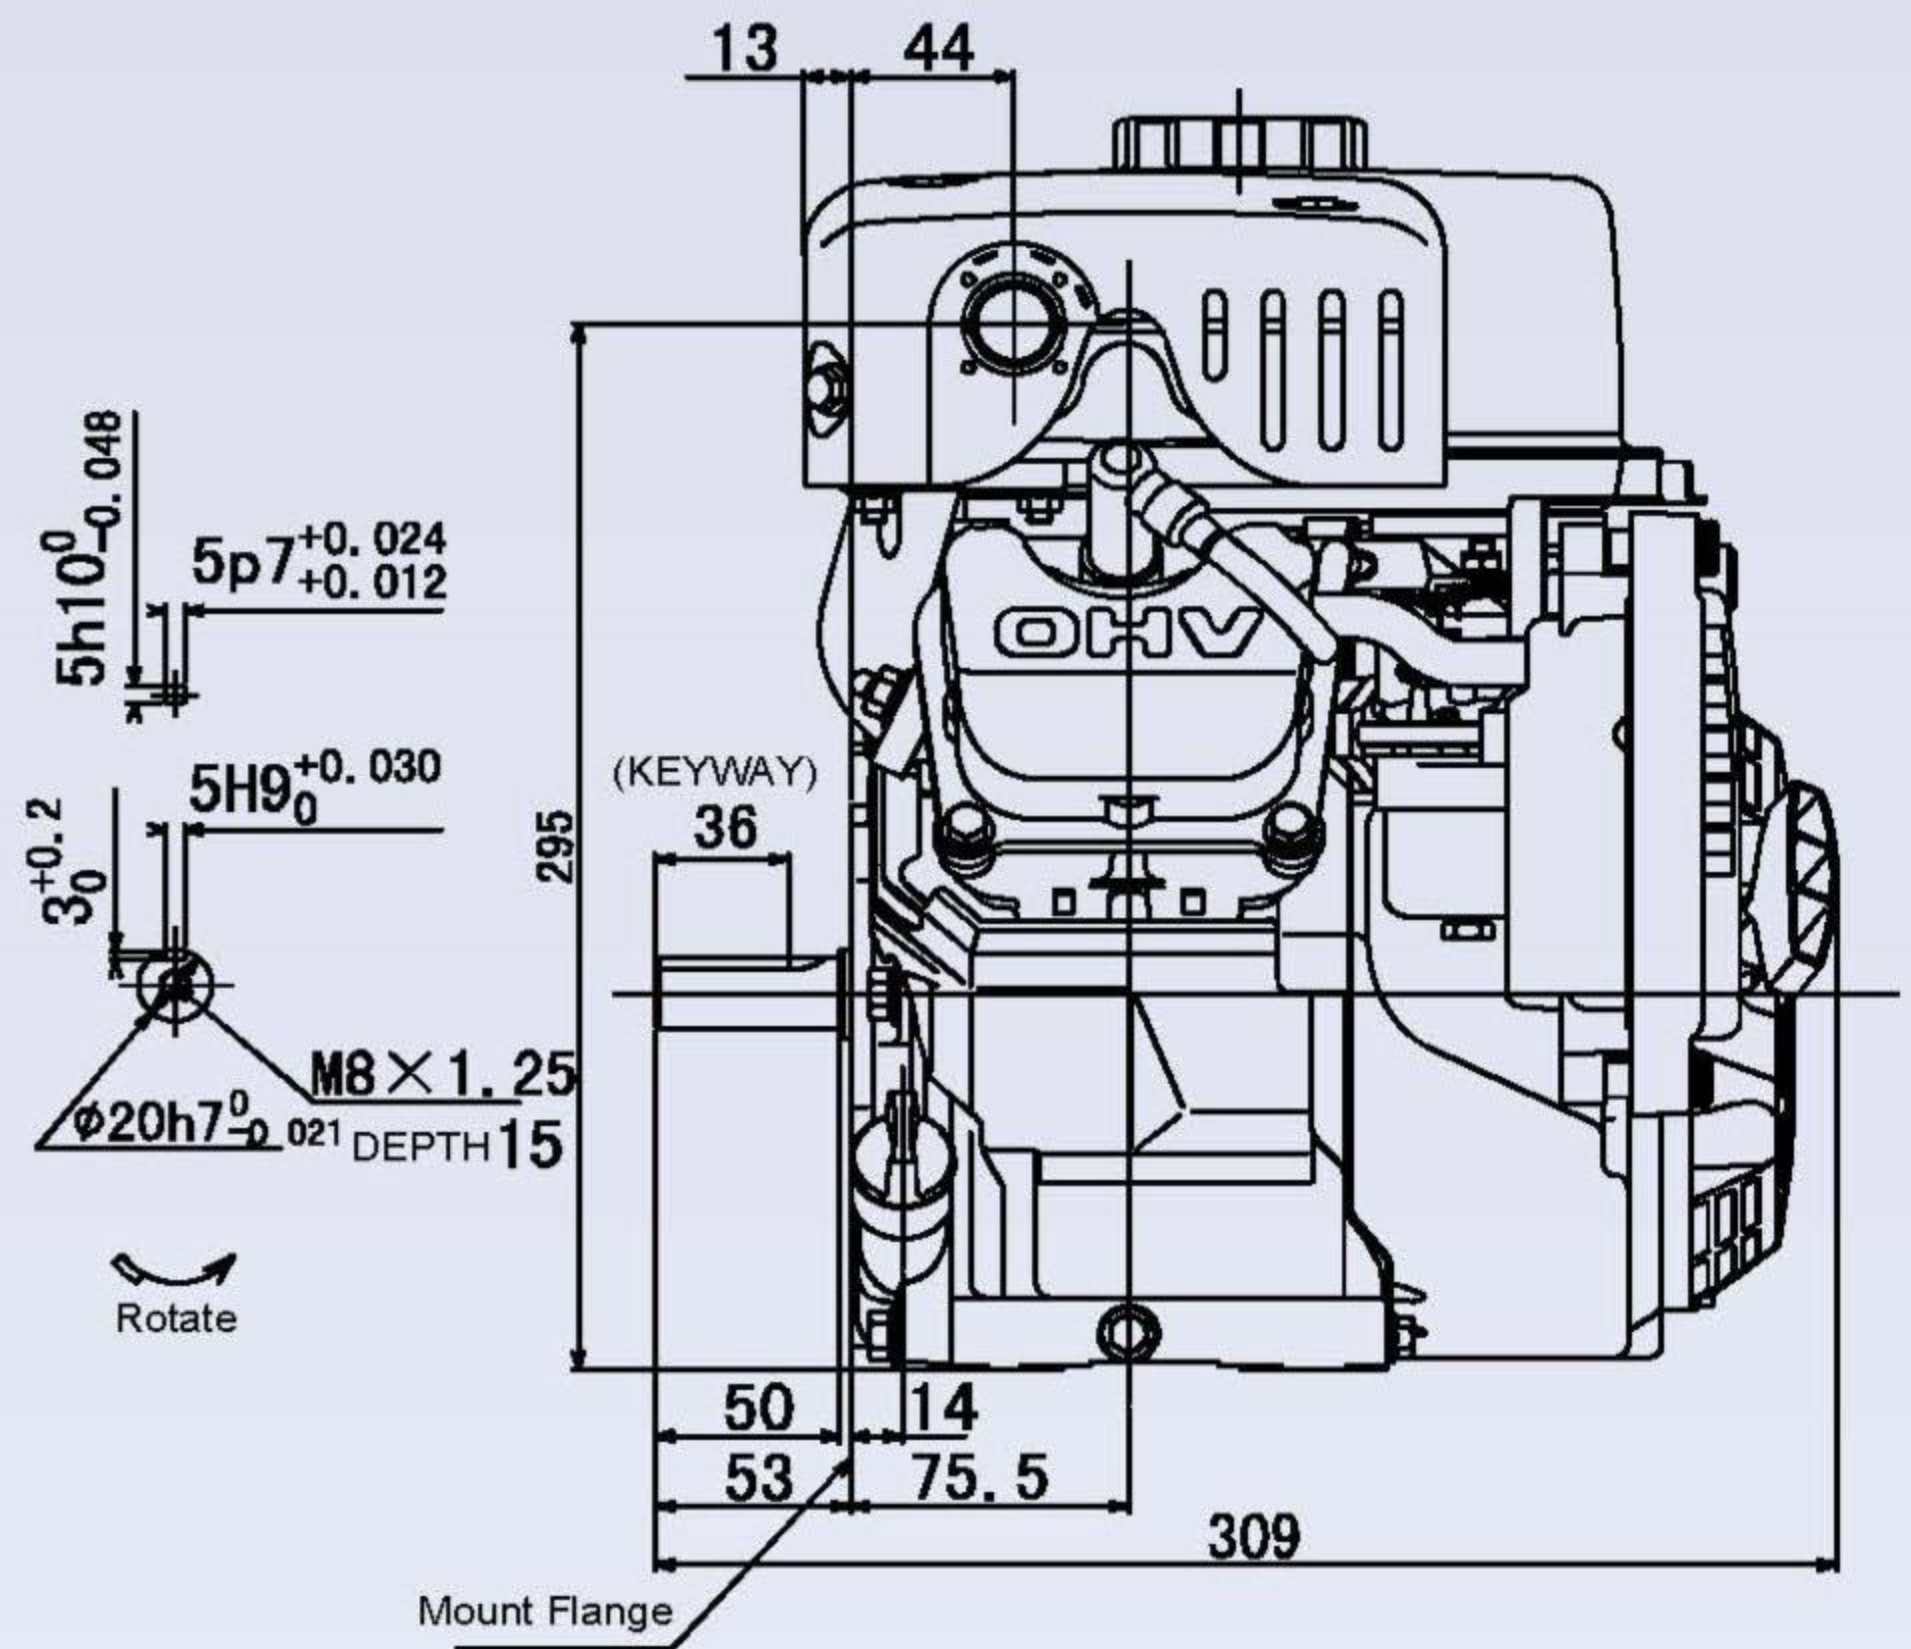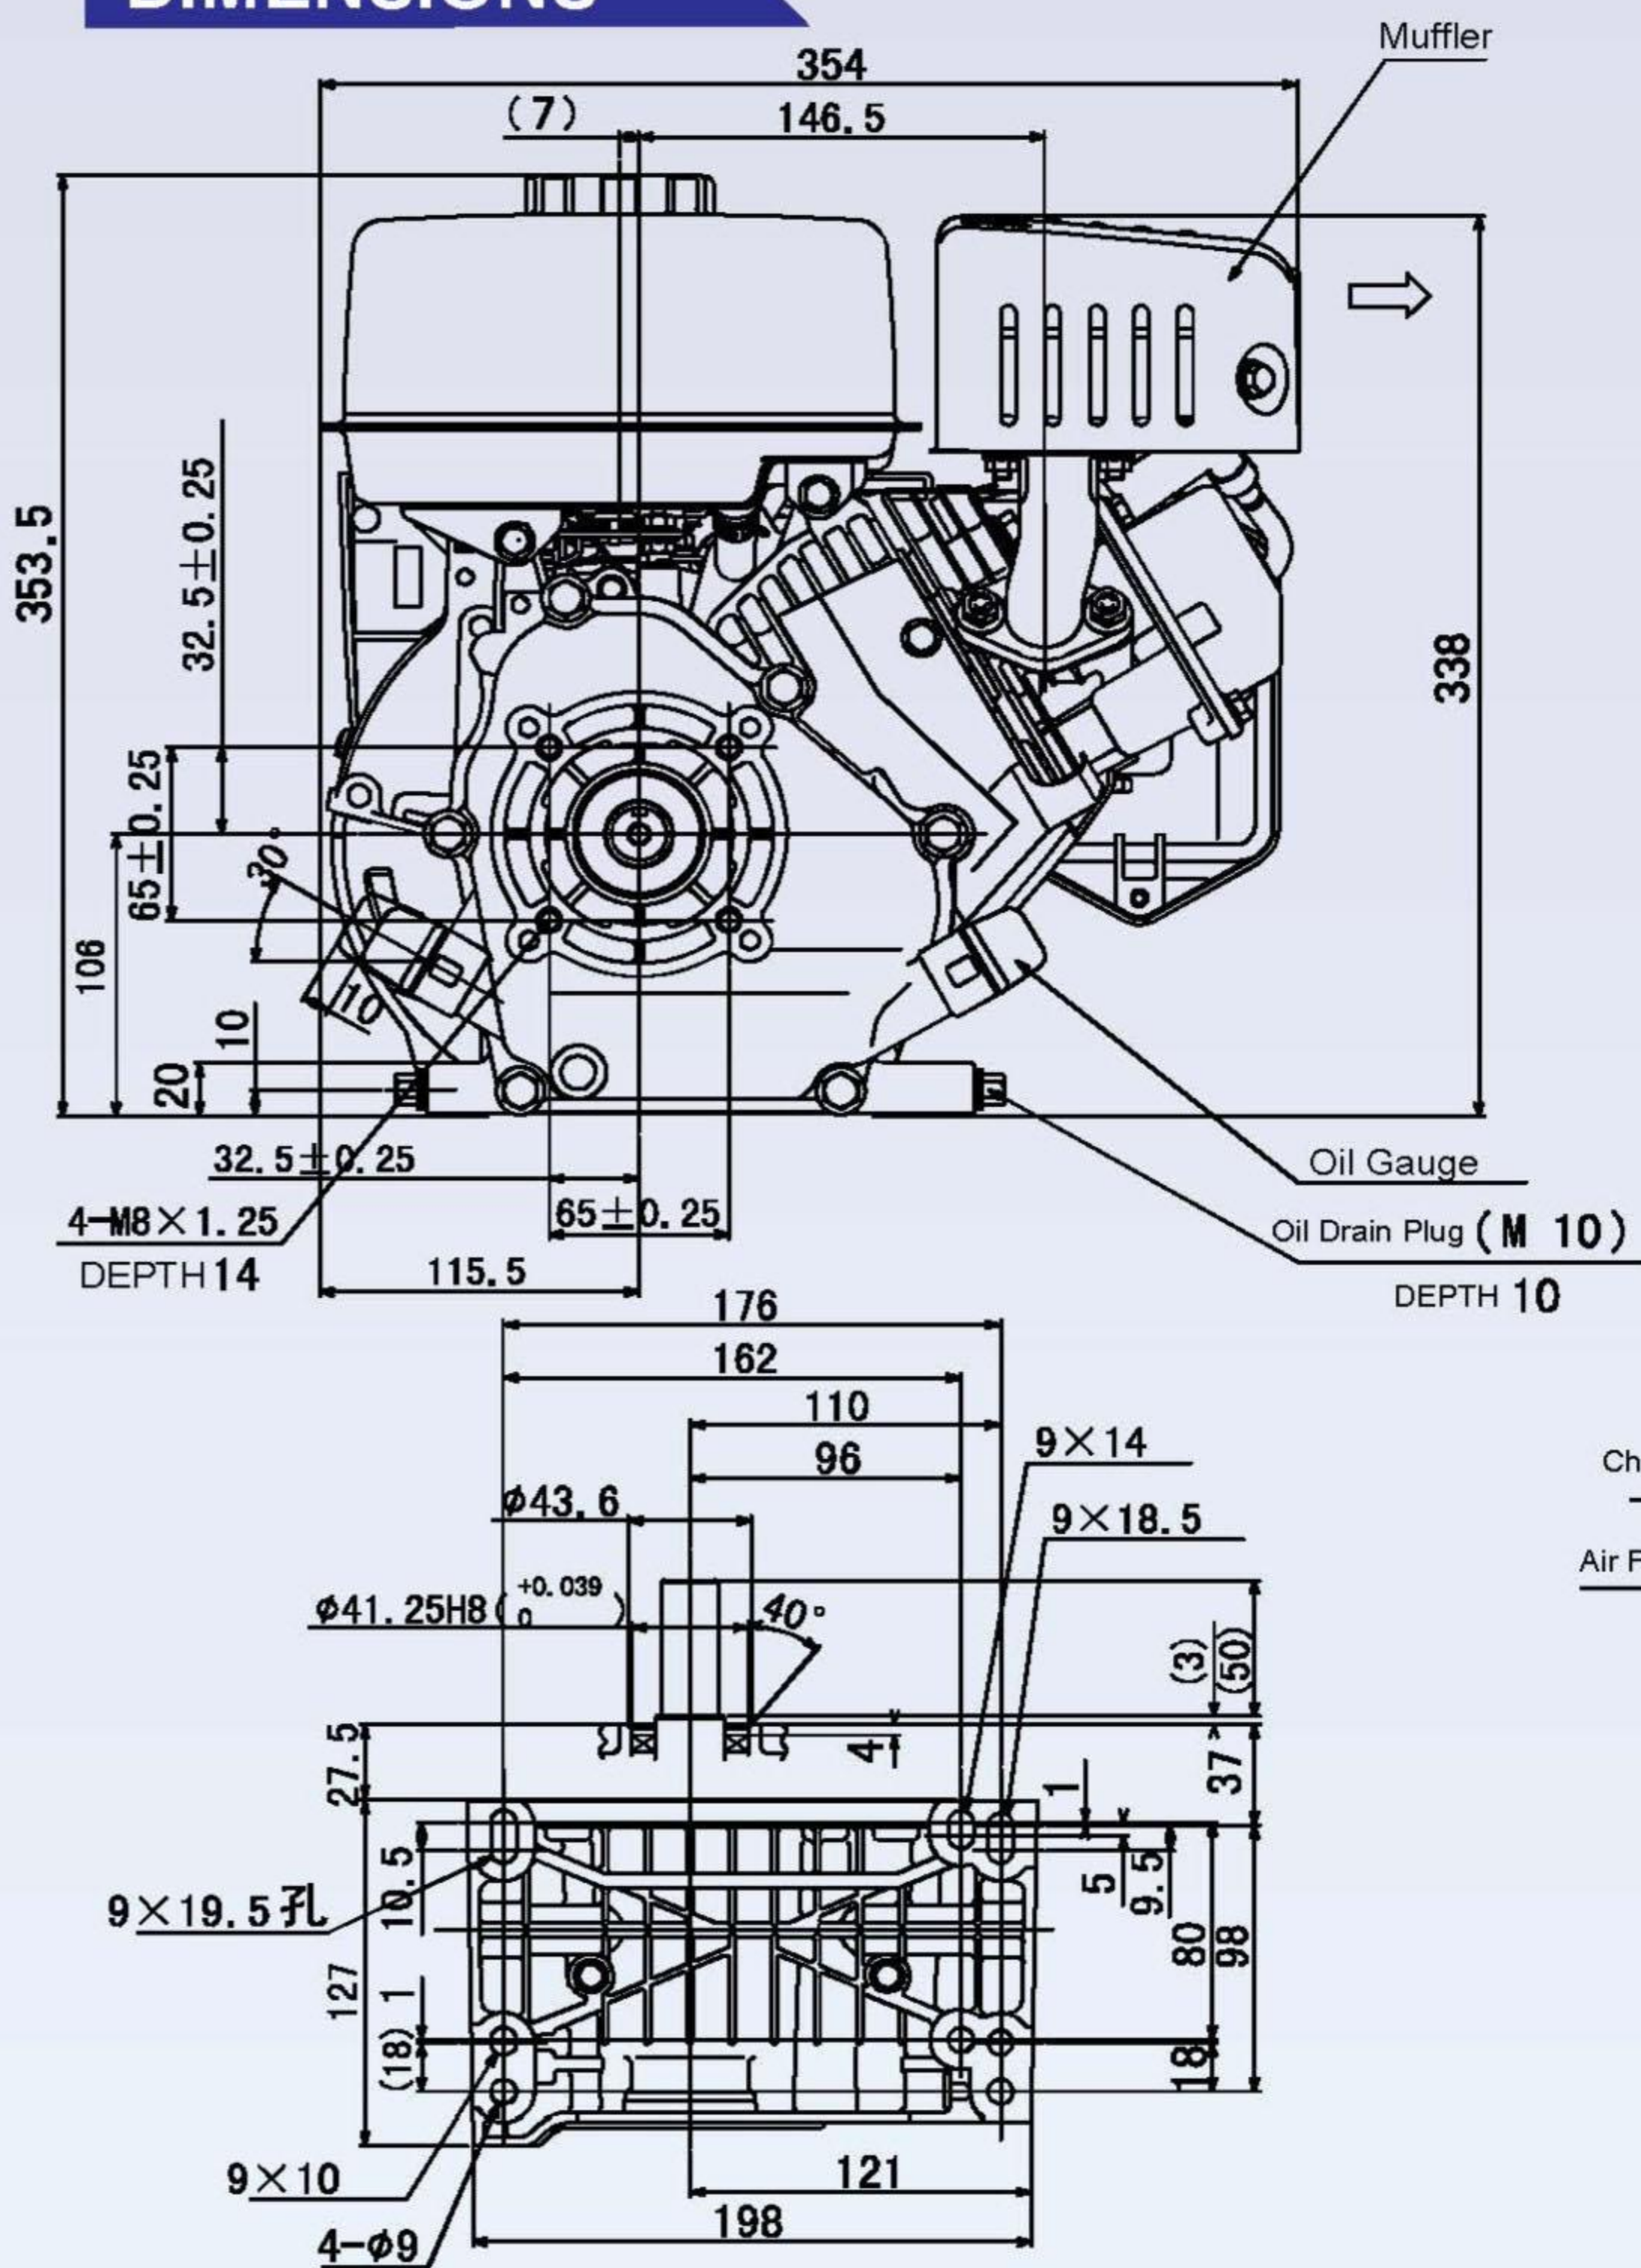

# PTO SHAFT TYPE

GT600	JIS (with JIS Mount Flange)	SAE (with SAE Mount Flange)
<b>KEYWAY</b> (General)		
<b>PUMP</b>		
<b>TAPER</b> (Generator)		