

EH10

细节决定品质
DETAIL DECISION QUALITY



EH10外观图



产品特点

- 操控简单
- 垂直气缸设计，润滑极佳，倾斜操作也十分良好
- 优良的耐用度
- 防震通气结构，加强型铸造机体，减振及耐用性获得极大改善
- 易启动
- 点火系统采用先进的点火定时及减压装置，经济、清洁
- 较高的燃油效率，减少了对环境的污染

Product features

Easy operation:
Vertical cylinder design, Excellent lubrication, Good lean operation
Excellent durability:
Shockproof & Ventilation structure, Enhanced casting body, the great improvement of vibration and durability
Easy starting:
The ignition system adopts the advanced ignition timing and pressure-relief device.
Economic and Clean:
Higher fuel efficiency reduces the pollution to the environment.

EH10型规格参数 (Specifications)

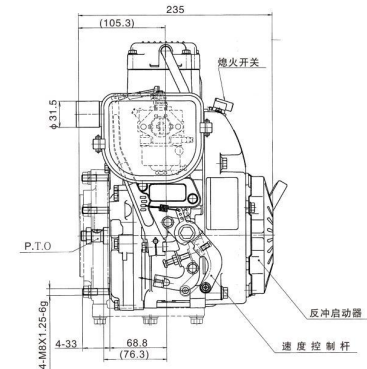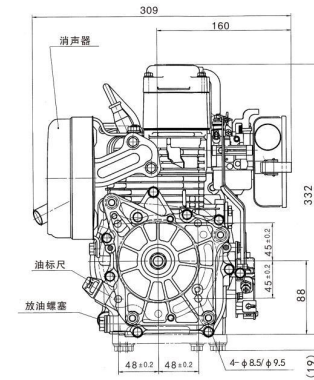

型号Model	EH10
形式Type	风冷四冲程单缸OHV汽油发动机 Air-cooled, 4-cycle, single cylinder OHV, horizontal P.T.O shaft
汽缸内径 × 冲程 Bore × Stroke	mm 53 × 44
排气量 Displacement	ml 97.1
额定功率 Continuous output	kW(PS)/rpm /
最大功率 Max. output	kW(PS)/rpm 2.4(3.3)/4200
最大扭矩 Max. torque	N·m(kgf·m)/rpm 5.7(0.58)/2800
输出轴旋转方向 Direction of rotation	逆时针方向 (面对输出轴端) Counter clockwise as viewed from P.T.O shaft side
使用燃料 Fuel	汽车用无铅汽油 Automobile unleaded gasoline
使用润滑油 Lubricant	发动机机油SE级以上, SAE10W-30 Automobile oil class SE or higher, SAE 10W-30
润滑油容量 Lubricant oil capacity	L 0.3
点火方式 Ignition system	飞轮磁 (固态) Flywheel magneto(solid state)
启动方式 Starting system	反冲式 Recoil starter
调速方式 Governor	离心重锤式 Centrifugal flyweight type
化油器 Carburetor	水平浮子式 Float type
火花塞 Spark plug	NGK BMR4A
净重 Net weight	Kg 9.9
尺寸 长 × 宽 × 高 Dimensions(L × W × H)	mm 235 × 309 × 341

