

## EX17

细节决定品质  
DETAIL DECISION QUALITY



EX17外观图



## 产品特点

- 轻柔的机声
- 容易启动-无回冲
- 方便保养
- 先进的技术
- 卓越的性能，更大的功率


## Product features

Extremely Silent-Soft Tone Quality  
Extremely Easy Start-No Kick-back  
Extremely Easy Maintenance  
Extremely Advanced Technology  
Extremely Power and Performance

## EX17型规格参数 (Specifications)

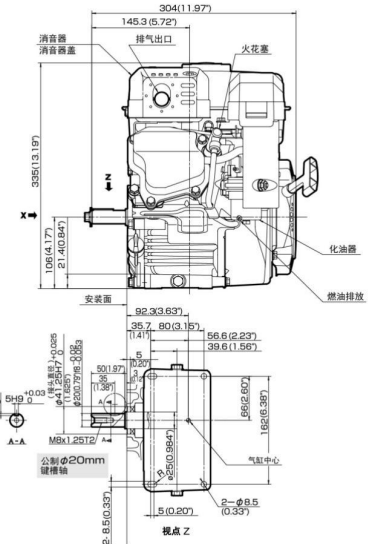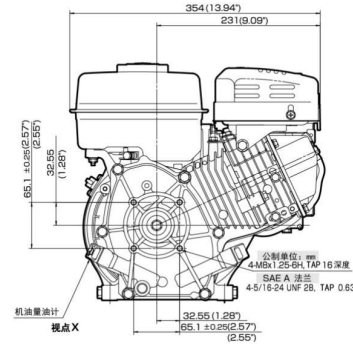

| 型号Model                                | EX17                                                                                         |
|----------------------------------------|----------------------------------------------------------------------------------------------|
| 形式Type                                 | 风冷四冲程气缸倾斜OHC汽油发动机<br>Air-cooled, 4-cycle, slant single cylinder, OHC, horizontal P.T.O shaft |
| 汽缸内径 × 冲程<br>Bore × stroke             | mm 67 × 48                                                                                   |
| 排气量<br>Displacement                    | ml 169                                                                                       |
| 额定功率<br>Continuous output              | kW(PS)/rpm 2.6(3.5)/3000 2.9(4.0)/3600                                                       |
| 最大功率<br>Max. output                    | kW(PS)/rpm 4.2(5.7)/4000                                                                     |
| 最大扭矩<br>Max. torque                    | N-m(Kgf-m)/rpm 11.3(1.15)/2500                                                               |
| 输出轴旋转方向<br>Direction of rotation       | 逆时针方向 (面对输出轴端)<br>Counter clockwise as viewed from P.T.O shaft side                          |
| 使用燃料<br>Fuel                           | 汽车用无铅汽油<br>Automobile unleaded gasoline                                                      |
| 燃料箱容量<br>Fuel tank capacity            | L 3.2                                                                                        |
| 使用润滑油<br>Lubricant                     | 发动机机油SE级以上, SAE 10W-30<br>Automobile oil class SE or higher, SAE 10W-30                      |
| 润滑油容量<br>Lubricating Oil capacity      | L 0.6                                                                                        |
| 点火方式<br>Ignition system                | 飞轮磁(固态)<br>Flywheel magneto (solid state)                                                    |
| 启动方式<br>Starting system                | 反冲式<br>Recoil starter                                                                        |
| 调速方式<br>Governor                       | 离心重锤式<br>Centrifugal flyweight type                                                          |
| 火花塞<br>Spark Plug                      | NGK BR6HS                                                                                    |
| 化油器<br>Carburetor                      | 水平浮子式<br>Float type                                                                          |
| 净重<br>Net weight                       | Kg 15                                                                                        |
| 尺寸 长 × 宽 × 高<br>Dimensions (L × W × H) | mm 304 × 354 × 335                                                                           |

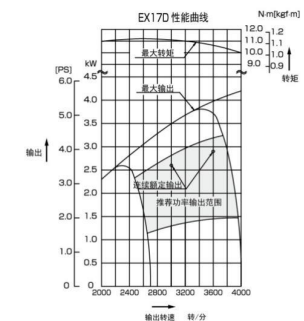

备注: 1. 上述性能为特别测试标准海平面大气  
状况下的功率。  
2. 其它条件参照JIS-B-8107标准。