


單位: mm



SQ25SK2Q

主要特点 MAIN FEATURE

1. 高强度钢板制造, 整机重量轻, 提高了起重作业性能;
2. 全回转技术, 回转高速平稳, 效率高, 作业方便;
3. 模块化设计, 具有多种操作形式的配置;
4. 起重機可选装有力矩限制系统, 重作业更加安全可靠。

1. Manufactured with strong steel plate makes lighter weight of the whole machine and higher lifting operation performance.
2. All rotation technology, rotate smoothly and high-speed, efficient and convenient operation.
3. Modular design, with operation in the form of a variety of configurations.
4. The crane can be equipped with an optional torque limit system so that the lifting operation is more safe and reliable.

SQ25SK2Q起重機主要技术参数


MAIN SPECIFICATION

型号	Model	SQ25SK2Q	单位unit
最大起升质量	Max Lifting Capacity	25000	Kg
最大起重力矩	Max Lifting Moment	62.5	T.m
推荐功率	Recommend Power	40	KW
液压系统最大流量	Max Oil Flow Of Hydraulic System	80	L/min
液压系统额定压力	Rated Pressure Of Hydraulic System	26	MPa
油箱容积	Oil Tank Capacity	300	L
回转角度	Rotation Angle	全回转	All Rotation
起重機自重	Crane Weight	13000	Kg
安装空间	Installation Space	3.0	m
起升质量/工作幅度	Lifting Capacity/Working Radius	25000/2.5	kg/m
		9200/6.5	
		5600/10.0	
		4000/13.5	
最大工作幅度	Max Working Radius	13.5	m
最大起升高度	Max Working Height	16	m

上述参数为改装后参数, 更多配置请向经销商咨询当地销售经理。
The above parameters are for refitted models, for more chassis options for refitting sake please consult the local sales manager.



单位: mm

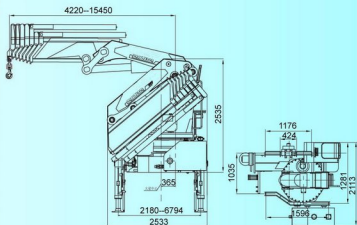

主要特点 MAIN FEATURE

- 1、高强度钢板制造，不仅整机重量轻，而且提高了起重作业性能；
- 2、全回转技术，回转高速平稳，效率高、作业方便；
- 3、起重机装有力矩限制阀，使起重作业更加安全可靠；
- 4、可选配JIB臂工作，幅度更大，满足用户进一步需求。

- 1、 Manufactured with strong steel plate makes lighter weight of the whole machine and higher lifting operation performance.
- 2、 All rotation technology, rotate smoothly and high-speed rotary, efficient and convenient operation.
- 3、 Equipped with a torque limit valve so that the lifting operation is more safe and reliable.
- 4、 Equipped with jib optionally, makes working radius longer, satisfy customer's need.

SQ25ZK6Q

SQ25ZK6Q 起重机主要技术参数

MAIN SPECIFICATION

JIB臂工作参数 JIB Working parameter

型号	Model	SQ25ZK6Q	单位/unit
最大起升质量	Max Lifting Capacity	25000	Kg
最大起重力矩	Max Lifting Moment	62.5	T.m
推荐功率	Recommend Power	50	KW
液压系统最大流量	Max Oil Flow Of Hydraulic System	80	L/min
液压系统额定压力	Rated Pressure Of Hydraulic System	31.5	MPa
油箱容积	Oil Tank Capacity	300	L
回转角度	Rotation Angle	全回转	All Rotation
起重机自重	Crane Weight	7945	Kg
安装空间	Installation Space	3.0	m
起升质量/工作幅度	Lifting Capacity/Working Radius	25000/2.50	kg/m
		14000/4.22	
		9300/5.93	
		6800/7.74	
		5400/9.59	
		4300/11.48	
3600/13.43			
3100/15.45			
最大工作幅度	Max Working Radius	15.45	m
最大起升高度	Max Working Height	17	m

起升质量/工作幅度/工作半径	1580/18.63	kg/m
	1450/20.31	
	1310/22.02	
	1200/23.76	
1100/25.53		

经参数为改装后参数，更多配置底盘车请咨询当地销售经理。

More parameters are for refitted models, for more chassis options for refitting sake please consult the local sales manager.

Truck Mounted Crane SQ25ZK6Q

www.wme.cn/TruckMountedCrane/