
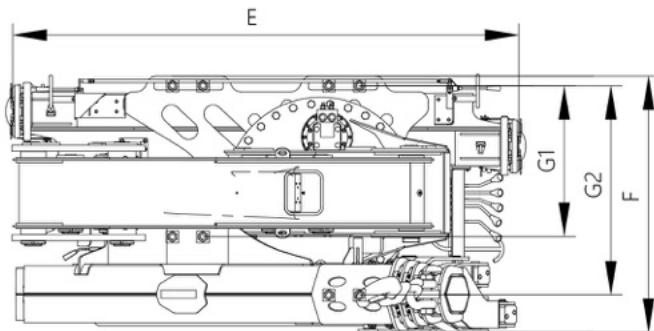
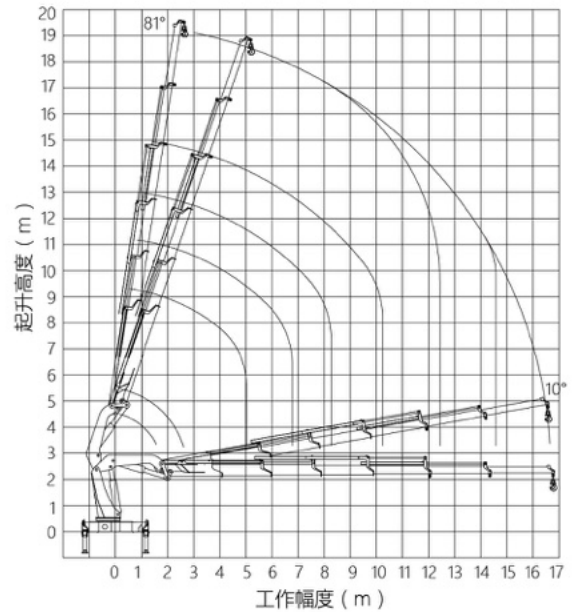


项目	ITEM	单位 Unit	GSQZ460.4	GSQZ460.5	GSQZ460.6
最大起升力矩	Max. lifting moment	kN·m	450	445	440
最大起升质量	Max. lifting capacity	kg	23000	23000	23000
最大液压伸臂长度	Max. hydraulic outreach	m	12.17	14.52	16.80
回转角度	Slewing angle	°	360° continuous	360° continuous	360° continuous
支腿跨距	Stabilizer spread	mm	7750	7750	7750
最大工作压力	Max. operating pressure	MPa	32	32	32
推荐流量	Recommended pump capacity	L/min	80	80	80
油箱容积	Oil tank capacity	L	270	270	270
自重	Dead weight	kg	5700	5920	6100

单位: mm	GSQZ460.4	GSQZ460.5	GSQZ460.6
A	4480-12170	4600-14520	4660-16800
B	2455	2455	2455
C	800-1340	800-1340	800-1340
D	2310-7750	2310-7750	2310-7750
E	2510	2510	2510
F	1280	1420	1420
G1	758	758	758
G2	1046	1046	1046

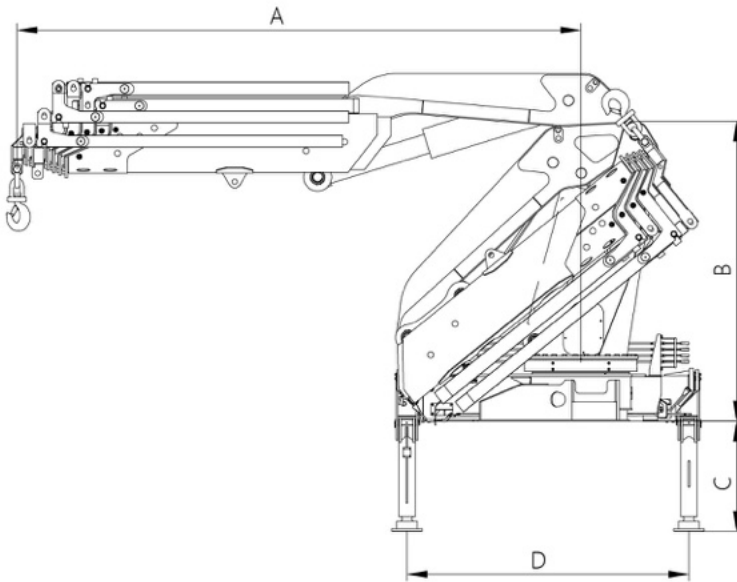

起重性能参数 RATED LIFTING LOAD

GSQZ460.4

幅度(m)	1.95	2.5	4.00	4.48	6.31	8.17	10.14	12.17
起重量(kg)	23000	18000	11800	10250	6930	5280	3930	3180

GSQZ460.5

幅度(m)	1.93	2.5	4.00	4.60	6.43	8.32	10.28	12.32	14.52
起重量(kg)	23000	17760	11500	9930	6880	5130	3865	3070	2510

GSQZ460.6

幅度(m)	1.91	2.5	4.00	4.66	6.49	8.38	10.34	12.38	14.58	16.80
起重量(kg)	23000	17600	11200	9670	6640	4810	3675	2910	2305	1940