
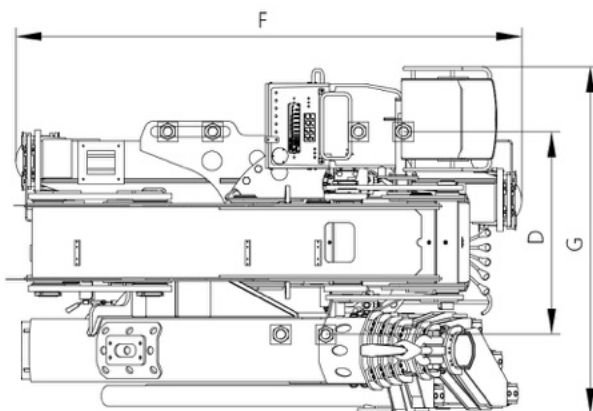
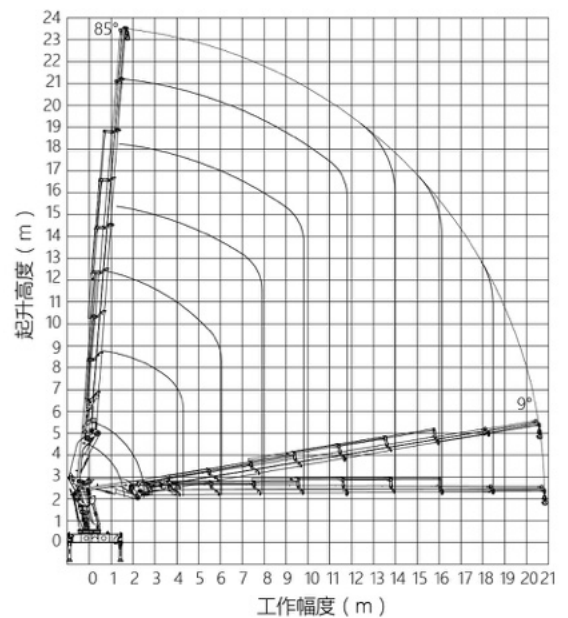


项目	ITEM	单位 Unit	GSQZ560.6	GSQZ560.7	GSQZ560.8
最大起升力矩	Max. lifting moment	kN·m	519	503	490
最大起升质量	Max. lifting capacity	kg	28000	28000	28000
最大液压伸臂长度	Max. hydraulic outreach	m	16.24	18.56	20.80
回转角度	Slewing angle	°	360° continuous	360° continuous	360° continuous
支腿跨距	Stabilizer spread	mm	8216	8216	8216
最大工作压力	Max. operating pressure	MPa	32	32	32
推荐流量	Recommended pump capacity	L/min	80	80	80
油箱容积	Oil tank capacity	L	300	300	300
自重	Dead weight	kg	6900	7150	7350

单位: mm	GSQZ560.6	GSQZ560.7	GSQZ560.8
A	4650-16240	4770-18560	4790-20800
B	2575	2575	2575
C	820-1340	820-1340	820-1340
D	1106.5	1106.5	1106.5
E	2326-8216	2326-8216	2326-8216
F	2540	2540	2540
G	1758	1778	1778

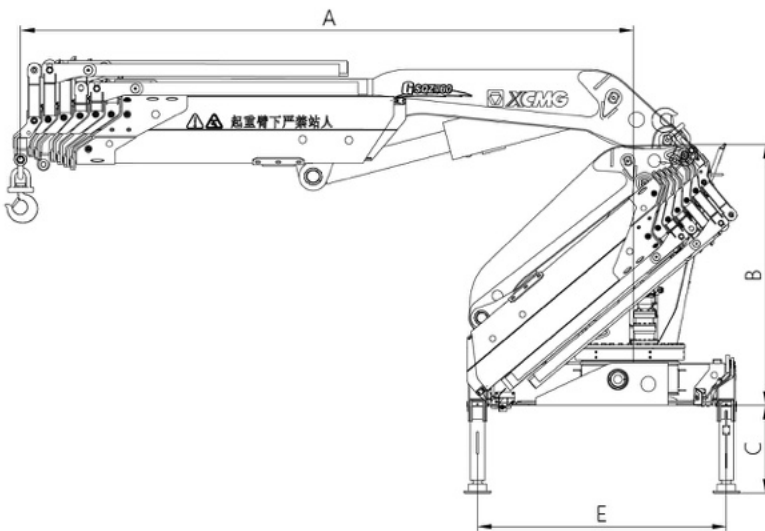

起重性能参数 RATED LIFTING LOAD

GSQZ560.6

幅度(m)	1.85	2.50	4.00	4.65	6.40	8.24	10.13	12.07	14.13	16.24
起重量(kg)	28000	20400	12600	11000	7750	5750	4550	3750	3100	2600

GSQZ560.7

幅度(m)	1.80	2.50	4.00	4.77	6.52	8.36	10.25	12.19	14.25	16.36	18.56
起重量(kg)	28000	20200	12360	10700	7550	5550	4370	3570	2960	2460	2150

GSQZ560.8

幅度(m)	1.75	2.50	4.00	4.79	6.54	8.38	10.27	12.21	14.27	16.38	18.58	20.80
起重量(kg)	28000	20000	12160	10500	7400	5400	4230	3440	2840	2340	2030	1750