


## Main features



### Advanced:

- High-torque supercharged engine combining advanced technology and excellent performance due to optimal power matching based on a power curve developed by XCMG, and meeting the requirements of China II emission standard.
- Specially developed and designed for transportation construction, municipal sanitation, sand and gravel quarries and other applications, and optimizing structural components by using the advanced finite element analysis (FEA) technology to reduce stress and improve performance.
- Integrated with optimally-matched hydraulic system to ensure outstanding performance in various operations; pipelines designed with dual sealing, i.e., 24° cones and O-rings, ensuring excellent performance which meets DIN standards.

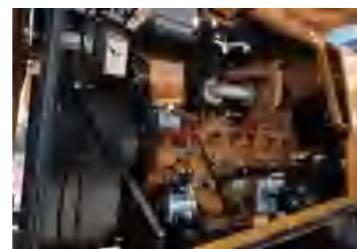

### Reliable:

- Configured with the largest fixed shaft transmission in the market and drivetrain system matched with XCMG heavy-duty drive axles as standard, featuring proven and mature technology to ensure reliable load capacity.
- Structural components optimized by using the finite element analysis (FEA) technology to reduce stress concentration, eliminate local weakness, and greatly improve reliability; adopting the robot-based welding technology to ensure uniform welds with a large depth and excellent fatigue resistance.
- Electrical and brake components properly arranged to in consideration of protection from sunshine, rain, pollution and other environmental factors, so as to improve the reliability of components.
- Drive shaft designed according to international standards, and fixing bolts with a larger-diameter distribution circle, ensuring excellent torsion resistance and adaptability to high-intensity, continuous and heavy-duty operations.
- All covering parts including the hood and cab made of high-quality steel profiled frame, which features high rigidity, light weight and excellent durability; hood skins fabricated by using the integral shaping technology in order to adapt to various bumpy operating conditions.




## Main features



### Energy-saving:

- Configured with turbocharged engine as standard, which is mechanically controlled like conventional products and less sensitive to diesel quality, enabling wider selection of oil products and improving the cost effectiveness.
- Optimized center layout of the machine to minimize the weight of the machine with increased tilting load and maximize the fuel efficiency.
- Perfect match between high-torque engine and high-pressure & small-displacement hydraulic system to ensure outstanding performance and less fuel consumption during operation.

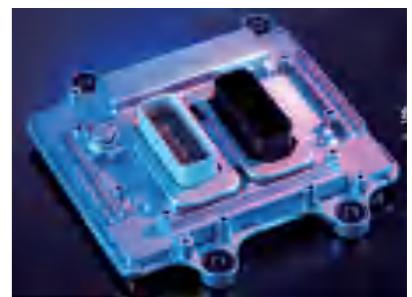

### High efficiency:

- Three-element torque converter with high efficiency to maximize the utilization rate of engine power; large-displacement single-pump split-flow hydraulic system featuring large cylinder power and fast arm lifting to improve the loading speed and efficiency.
- A variety of bucket capacities designed according to different material densities, and buckets with optimized shape enabling easy insertion into material piles and higher fillability; combined with operating linkages designed for different dumping heights to ensure high-efficiency operation in various applications.
- Configured with fixed shaft transmission with 4 forward gears and 2 reverse gears, ensuring reasonable speed distribution and high-efficiency operation whether it is heavy-duty excavation and loading or transfer to the site under no-load condition.



## Comfortable:

- Luxury car-like cab equipped with high-performance aviation seat and large space to ensure safe and comfortable riding experience.
- All operating elements and buttons arranged within easy reach to enable convenient performance of various operations; fully-covered aesthetic interior creating the best operating environment in the cab.
- Full-viewing rear glass and high-mounted rear lights, to ensuring wide view of field and safe reversing.
- Configured with aesthetic and easy-to-operate LCD instrument as standard; the whole series equipped with high-power heating and cooling air conditioner as standard, suitable for all kinds of severe cold and hot conditions.



## Convenient:

- Engine hood designed with frame structure and large flip-up side door with large opening angle, enabling easy inspection and maintenance of engine and radiator.
- Easy maintenance ensured due to centralized fuse box and centralized display of electrical system operating status.
- Hydraulic oil reservoir designed with independent-cavity oil return circuit to ensure easy maintenance.
- Optimized arrangement of all maintenance units, filling and discharge ports within easy reach to ensure simple operation.





| Tool name              | Parameter (mm)  | Tool structure  | Function and operation conditions   |
|------------------------|---|---|---|
| Split pairing clamp    | Opening:1590<br>Holding circle:1090<br>Width:2200       |    | Function:<br>Loading, unloading and transportation of wood, boards and other materials.<br>Main applications:<br>Ports, docks, timber processing, forest farms, etc.  |
| Integral pairing clamp | Opening: 2740<br>Holding circle:1344<br>Width:2500      |    | Function:<br>Loading, unloading and transportation of plates, wood blocks, sticks, branches and other materials.<br>Main applications:<br>Wood processing plants, forest farms, card-board factories, biological power plants, etc.     |
| Clamp (staggered)      | Opening: 1550<br>Holding circle:100<br>Width:2350       |   | Function:<br>Loading, unloading and transportation of wood, boards and other materials.<br>Main applications:<br>Ports, docks, timber processing, forest farms, etc.  |
| Pipe clamp             | Opening:1660<br>Holding diameter: 130/840<br>Width:2500 |  | Function:<br>Loading, unloading and transportation of pipes, plates and other materials. Support multiple functions such as pairing clamp, staggered clamp and forks.<br>Main applications:<br>Oil fields, wood processing plants, etc. |
| Frog-mouth clamp       | Opening:1880<br>Holding circle:980<br>Width:1780        |  | Function:<br>Loading, unloading and transportation of wood, boards and other materials.<br>Main applications:<br>Ports, docks, timber processing, forest farms, etc.  |
| Grass clamp            | Opening:2900<br>Holding circle:1470<br>Width:2580       |  | Function:<br>Loading, unloading and transportation of plates, wood blocks, sticks, branches and other materials.<br>Main applications:<br>Docks, timber processing, forest farms, paper mills, biomass power plants, etc.               |
| Quick clamp            | Opening:1780<br>Holding circle:430<br>Width:2380        |  | Function:<br>Loading, unloading and transportation of wood, boards and other materials.<br>Main applications:<br>Ports, docks, timber processing, forest farms, etc.  |

# Main Specifications

OPTIMUM SERVICES XCMG GUARANTEED



## Dimensions

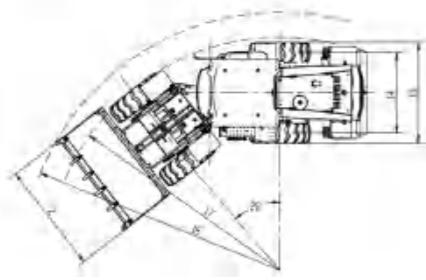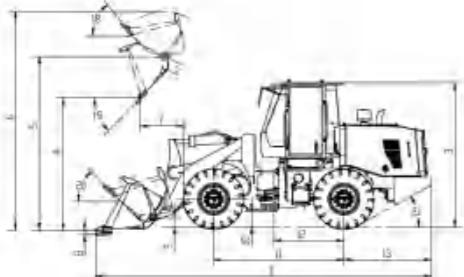

## Specifications

| Parameter                              | Parameter      | Unit           |
|--|----------------|----------------|
| Rated load kg                          | 5500           | kg             |
| Rated bucket capacity m <sup>3</sup>   | 3.2            | m <sup>3</sup> |
| Rated power kW                         | 162            | kW             |
| Working mass kg                        | 16950±300      | kg             |
| Max tractive force kN                  | 160±5          | kN             |
| Max breakout force kN                  | 180±5          | kN             |
| Wheel base mm                          | 3350           | mm             |
| Wheel track mm                         | 2250           | mm             |
| Dumping height mm                      | 3070           | mm             |
| Dumping range mm                       | 1240           | mm             |
| Boom lifting time s                    | 5              | s              |
| Total s                                | 10             | s              |
| Max gradeability °                     | 28             | °              |
| Steering angle °                       | 40             | °              |
| Speed at Gear 1 (forward/reverse) km/h | 13/17          | km/h           |
| Speed at Gear 2 (forward/reverse) km/h | 40             | km/h           |
| Overall dimensions (L × W × H) mm      | 8380×2996×3455 | mm             |

• The technology of XCMG backhoe loaders is subject to constant improvement and upgrading. In case the specifications or detailed appearance contained in this brochure differ from actual products, the latter shall prevail;

• XCMG reserves the right of final interpretation for the above. Our products may be modified without prior notice to users.

| Parameter                             | XC958 standard arm 3.2 m <sup>3</sup> | XC958 small-height dumping 3.0 m <sup>3</sup> | XC958 Russia (small-height dumping) 3.2 m <sup>3</sup> |
|---------------------------------------|---------------------------------------|---|--|
| Overall length mm                     | 8380                                  | 8580  | 8610   |
| Overall width mm                      | 2996                                  | 2996  | 2996   |
| Overall height mm                     | 3455                                  | 3455  | 3455   |
| Dumping height mm                     | 3070                                  | 3380  | 3360   |
| Pivot height mm                       | 4150                                  | 4450  | 4450   |
| Maximum lift height mm                | 5665                                  | 5900  | 5965   |
| Dumping range mm                      | 1240                                  | 1150  | 1170   |
| Digging depth mm                      | 90                                    | 80  | 80   |
| Transport pin height mm               | 560                                   | 560   | 560  |
| Min ground clearance mm               | 425                                   | 425   | 425  |
| Wheel base mm                         | 3350                                  | 3350  | 3350   |
| From the center of rear axle mm       | 1675                                  | 1675  | 1675   |
| Rear overhang length mm               | 2140                                  | 2140  | 2140   |
| Wheelbase mm                          | 2250                                  | 2250  | 2250   |
| Mainframe width mm                    | 2850                                  | 2850  | 2850   |
| Turning radius (outside of tool) mm   | 6750                                  | 6820  | 6825   |
| Turning radius (outside of tyre) mm   | 6045                                  | 6045  | 6045   |
| Rollback angle during lifting °       | 57                                    | 57  | 57   |
| Dumping angle °                       | 45                                    | 45  | 45   |
| Dumping angle at transport position ° | 47                                    | 47  | 47   |
| Departure angle °                     | 28                                    | 28  | 28   |
| Vehicle steering angle °              | 40                                    | 40  | 40   |



XCMG approved attachments



Genuine parts



Financial solutions



Maintenance contract



Telematics

## Professional Integrated Complete Solutions

XCMG has built a strong reputation based on the quality, reliability and durability of its construction machinery. What's more, XCMG has gradually established a service network to constantly provide its local integrated and highly efficient complete solutions for all customers.

## Full Range of Services Ready for you

In order to respond to your needs as fast as possible, XCMG's experts are on their way to your job site from one of our facilities near you. Full range of services are available in order to reduce your total cost of ownership and increase your revenue.



## XCMG Global Spare Parts System

