










☑**※CMG** 徐**I**挖机 XE155WGA



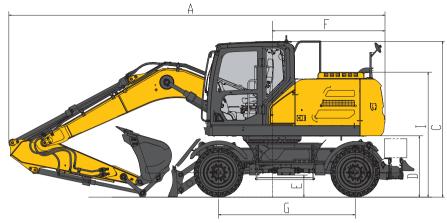





Working o	device	
G. 1 1	Boom length/mm	4600
Standard	Bucket rod length/mm	2100
	Boom length/mm	/
Optional	Bucket rod length/mm	2500
	Bucket capacity/m3	0.26-0.7

Model	XE155WGA
Operating weight/kg	14200
Bucket capacity/m³	0.6

Engine	
Model	CUMMINS F4.5CS4145
Direct injection	√
4-Stroke	√
Water cooling	√
Turbocharged	/
Air and air cooling	
Number of cylinders	4
Rated output power/speed/kW/rpm	108/2200
Maximum torque/speed/N·m/rpm	600/1200-1700
Displacement L	4.5

Oil capacity		
Fuel tank capacity L	250	
Hydraulic fuel tank capacity L	118	
Engine oil capacity L	12	

Dimensions		Unit: mm
A Total length	7705	
B Total width	2510	
C Total height	3200	
D Counterweight ground clearance	1258	
E Minimum ground clearance	380	
Minimum tail swing radius	2310	
G Wheelbase	2800	
H Turntable width	2490	
I Hood height	2560	

Scope of work		Unit: mm
A Maximum digging height	8210	
B Maximum unloading height	5875	
C Maximum digging depth	4620	
D Maximum digging radius	7780	
E Minimum steering radius	6500	

Main performance	
Driving speed (high/low) km/h	37/11
Rotation speed r/min	12
Climbing ability°	35
Bucket digging force/kN	100
Stick digging force/kN	80
Maximum traction/kN	82

Hydraulic system	
Main pump	2 plunger pumps
Rated flow rate of main pump L/min	2X176
Main safety valve pressure/MPa	34.3
Walking system pressure/MPa	34.3
Rotary system pressure/MPa	25
Pilot system pressure/MPa	3.9

Note: This product is constantly updated and improved with technological progress, and is subject to modification without prior notice. The final interpretation of the above content belongs to the company.