
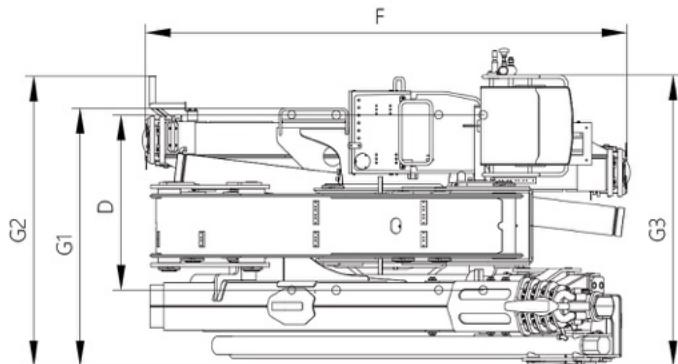
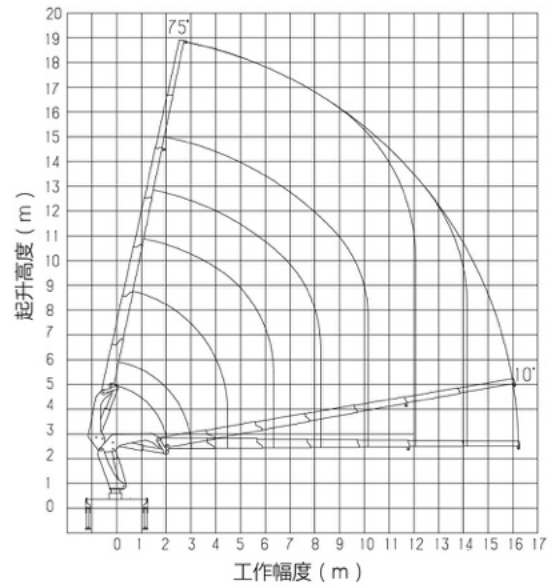


项目	ITEM	单位 Unit	GSQZ330.4	GSQZ330.5	GSQZ330.6
最大起升力矩	Max. lifting moment	kN·m	338	333	330
最大起升质量	Max. lifting capacity	kg	16500	16500	16500
最大液压伸臂长度	Max. hydraulic outreach	m	12.0	14.11	16.37
回转角度	Slewing angle	°	400	400	400
支腿跨距	Stabilizer spread	mm	2312-5750	2342-7782	2342-7782
最大工作压力	Max. operating pressure	MPa	31	31	31
推荐流量	Recommended pump capacity	L/min	63	63	63
油箱容积	Oil tank capacity	L	200	200	200
自重	Dead weight	kg	4775	4945	5100

单位: mm	GSQZ330.4	GSQZ330.5	GSQZ330.6
A	4250-12000	4300-14110	4400-16370
B	2420	2420	2420
C	809-1369	809-1369	809-1369
D	971	971	971
E	2312-5750	2342-7782	2342-7782
F	2500	2500	2500
G1	1212	1354	1354
G2	1381	1523	1523
G3	1387	1519	1519

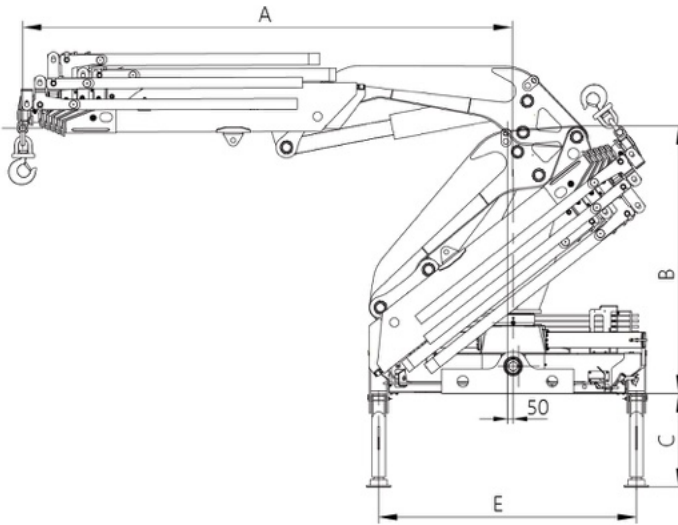

起重性能参数 RATED LIFTING LOAD

GSQZ330.4

幅度(m)	2.05	2.5	4.25	6.08	8.01	10.0	12.0
起重量(kg)	16500	13460	7959	5482	4089	3235	2685

GSQZ330.5

幅度(m)	2.03	2.5	4.3	6.135	8.06	10.04	12.04	14.11
起重量(kg)	16500	13320	7764	5315	3931	3080	2530	2152

GSQZ330.6

幅度(m)	2.0	2.5	4.4	6.235	8.16	10.14	12.14	14.21	16.37
起重量(kg)	16500	13200	7500	5100	3750	2930	2410	2025	1700