
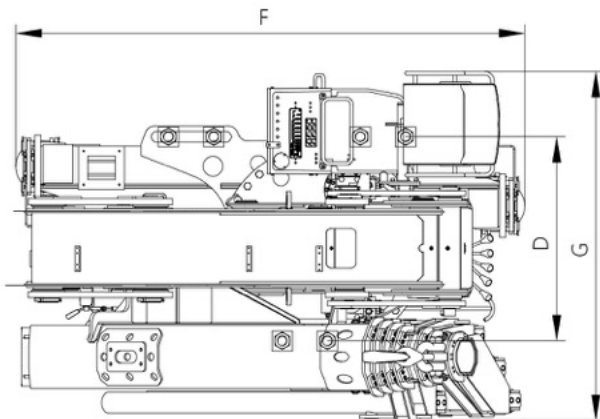
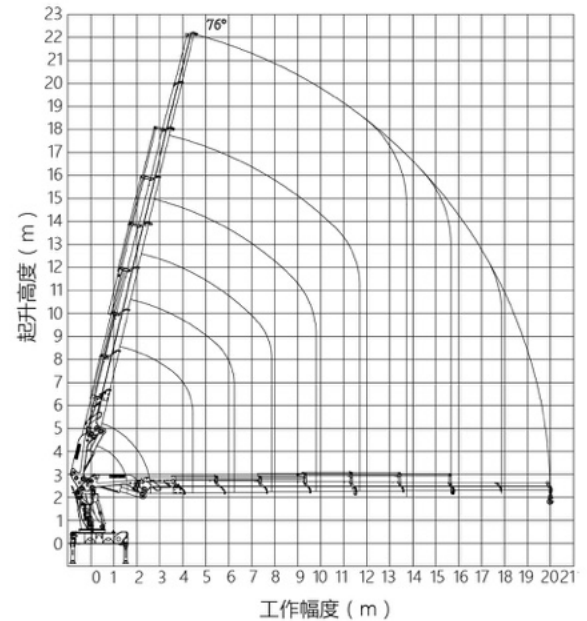


项目	ITEM	单位 Unit	GSQZ660.6	GSQZ660.7	GSQZ660.8
最大起升力矩	Max. lifting moment	kN·m	607	603	599
最大起升质量	Max. lifting capacity	kg	33000	33000	33000
最大液压伸臂长度	Max. hydraulic outreach	m	16.03	18.34	20.67
回转角度	Slewing angle	°	360° continuous	360° continuous	360° continuous
支腿跨距	Stabilizer spread	mm	8216/8000	8216/8000	8216/8000
最大工作压力	Max. operating pressure	MPa	33	33	33
推荐流量	Recommended pump capacity	L/min	80	80	80
油箱容积	Oil tank capacity	L	300	300	300
自重	Dead weight	kg	7100	7300	7500

单位: mm	GSQZ660.6	GSQZ660.7	GSQZ660.8
A	4530-16030	4660-18340	4790-20670
B	2450	2450	2450
C	820-1340/958-1302	820-1340/958-1302	820-1340/958-1302
D	1136.5/1204	1136.5/1204	1136.5/1204
E	2328-8216/2308-8000	2328-8216/2308-8000	2328-8216/2308-8000
F	2540	2540	2540
G	1766	1786	1786

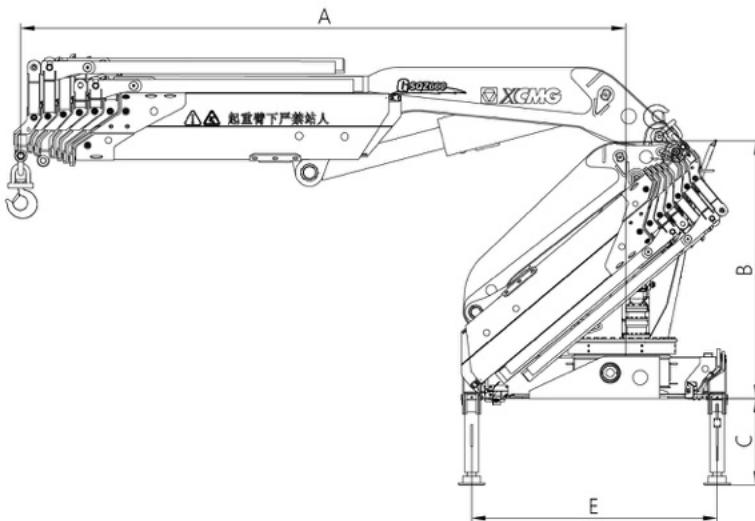

起重性能参数 RATED LIFTING LOAD

GSQZ660.6

幅度(m)	1.84	2.5	4.0	4.53	6.28	8.11	9.98	11.9	13.93	16.03
起重量(kg)	33000	24270	15175	13400	9550	7300	5870	4800	3940	3280

GSQZ660.7

幅度(m)	1.83	2.50	4.00	4.66	6.4	8.24	10.1	12.03	14.06	16.16	18.34
起重量(kg)	33000	24140	15086	12950	9200	6950	5500	4500	3650	3050	2630

GSQZ660.8

幅度(m)	1.81	2.50	4.00	4.79	6.54	8.37	10.24	12.16	14.2	16.3	18.47	20.67
起重量(kg)	33000	23950	14968	12500	8930	6750	5300	4300	3450	2850	2430	2130