图片中的标准尺寸，请参阅对照下面的参数表

Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

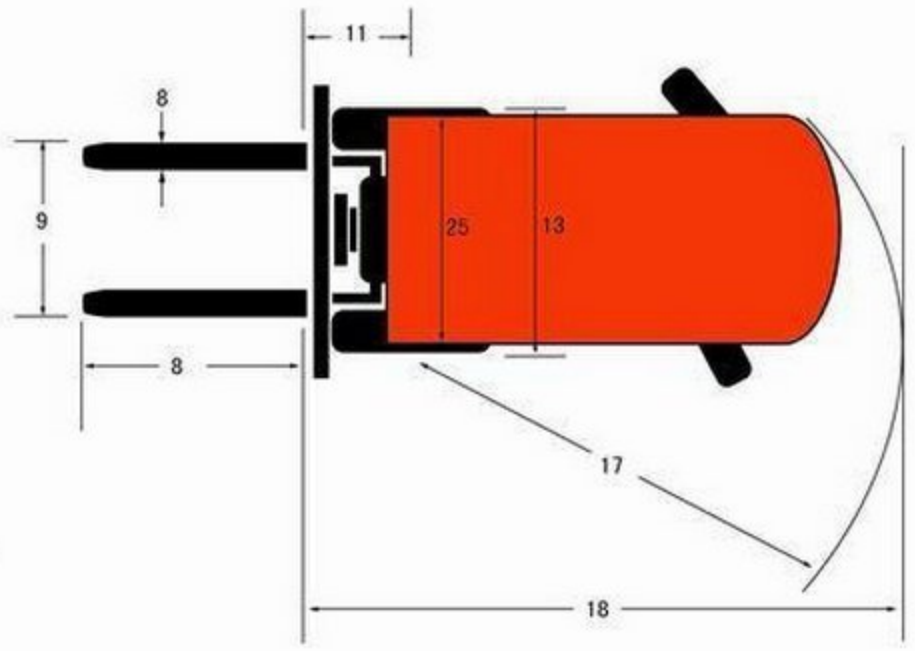

技术性能参数 Specifications

概　要	General							
1	制造商		Manufacturer	WME FORKLIFT				
2	型号		Model		CPC40	CPCD40	CPCD45	CPCD50
3	动力型式		Power type		柴油 Diesel	柴油 Diesel	柴油 Diesel	柴油 Diesel
4	额定载荷		Rated capacity	kg	4000	4000	4500	5000
5	载荷中心距		Load center	mm	500	500	500	500
尺　寸	Dimensions							
6	起升高度		Lifting height	mm	3000	3000	3000	3000
7	自由起升高度		Free lifting height	mm	150	150	150	150
8	货叉尺寸		Fork size	mm	1070*150*50	1070*150*50	1070*150*55	1070*150*55
9	货叉间距（外侧）最大/最小		Fork spread(outside) Max./Min.	mm	300/1200	300/1200	300/1200	300/1200
10	门架倾角		Mast tilt angle	deg	6/12	6/12	6/12	6/12
11	前悬距		Front overhang	mm	565	565	565	565
12	外形尺寸 Overall Dimensions	总长	Overall length	mm	4185	4185	4185	4195
13		总宽	Overall width	mm	1485	1485	1485	1485
14		门架不起升高度	Mast closed height	mm	2350	2350	2350	2350
15		门架起升高度	Mast extended height	mm	4100	4100	4100	4100
16		安全架高度	Overhead guard height	mm	2300	2300	2300	2300
17	最小转弯半径		Min.turning radius	mm	2850	2850	2850	2890
18	最小直角通道宽度		Min.right angle aisle width	mm	3415	3415	3415	3460
性　能	Performance							
19	空载/满载 No/Full load	行驶速度	Travel speed	km/h	20	20	20	20
20		起升速度	Lift speed	mm/sec	450	450	450	430
21	最大爬坡度		Max. gradeability	%	20	20	20	20
22	自重		Self weight	kg	6100	6450	6770	7050
底　盘	Chassis							
23	轮胎 Tires	前轮	Front	mm	300-15-14PR	300-15-14PR	300-15-14PR	300-15-14PR
24		后轮	Rear	mm	700-12-12PR	700-12-12PR	700-12-12PR	700-12-12PR
25	轮距 Tread	前轮	Front	mm	1185	1185	1185	1185
26		后轮	Rear	mm	1190	1190	1190	1190
27	轴距		Wheelbase		2000	2000	2000	2000
28	最小离地间隙		Min.mast ground clearance		145	145	145	145
动力单位与传动	Drive unit&control							
29	蓄电池		Battery	V/AH	12/100	2*12/80	2*12/80	2*12/80
30	发动机 Engine	型号	Model		新柴498BPG	潍坊 R4105G25	潍坊 R4105G25	潍坊 R4105G25
31		产地	Manufacturer		China	China	China	China
32		额定功率	Rated power	kw/rpm	45/2500	59/2300	59/2300	59/2300
33		额定扭矩	Rated torque	N.m/rpm	198/1800	280/1800	280/1800	280/1800
34		缸数	No. of cylinders		4	4	4	4
35		缸径X行程	Bore*stroke	mm	98*105	105*120	105*120	105*120
36		排量	Displacement	cm^3	3168	4156	4156	4156
37		油箱容量	Fuel tank capacity	L	90	90	90	90
38		油耗	Comsumption	g/kw.h	225	220	220	220

www.wme.cn

因我公司产品持续不断的更新及改进，样本所注参数、技术资料、图片等信息仅作参考，如我公司所注参数修改不另作通知。

Specifications, equipment, technical data, photos and illustrations are based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment