


图片中的标准尺寸，请参阅对照下面的参数表

Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

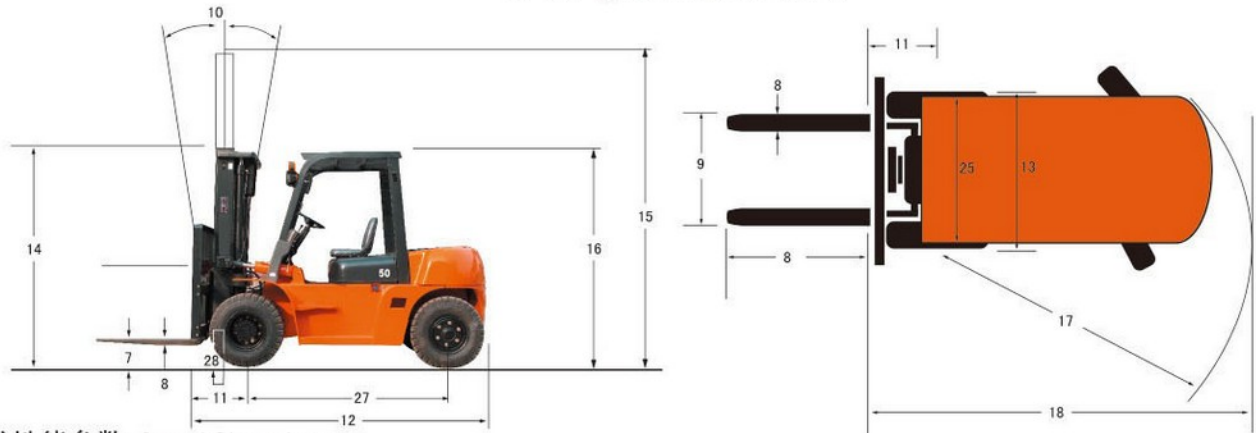

技术性能参数 Specifications

概要 General		FORKLIFT			
1	制造商	Manufacturer		CPCD50	CPCD60
2	型号	Model		柴油 Diesel	柴油 Diesel
3	动力型式	Power type		柴油 Diesel	柴油 Diesel
4	额定载荷	Rated capacity	kg	5000	6000
5	载荷中心距	Load center	mm	600	600
尺寸 Dimensions					
6	起升高度	Lifting height	mm	3000	3000
7	自由起升高度	Free lifting height	mm	160	160
8	货叉尺寸	Fork size	mm	1220*150*60	1220*150*60
9	货叉间距（外侧）最大/最小	Fork spread(outside) Max./Min.	mm	1845/300	1845/300
10	门架倾角	Mast tilt angle	deg	6/12	6/12
11	前悬距	Front overhang	mm	635	635
12	外形尺寸 Overall Dimensions	总长 Overall length	mm	3472	3592
13		总宽 Overall width	mm	1995	1995
14		门架不起升高度 Mast closed height	mm	2519	2519
15		门架起升高度 Mast extended height	mm	4419	4419
16		安全架高度 Overhead guard height	mm	2500	2500
17	最小转弯半径	Min. turning radius	mm	3300	3450
18	最小直角通道宽度	Min. right angle aisle width	mm	3000	3090
性能 Performance					
19	空载/满载 No/Full load	行驶速度 Travel speed	km/h	24	24
20		起升速度 Lift speed	mm/sec	390	360
21	最大爬坡度	Max. gradeability	%	20	20
22	自重	Self weight	kg	8240	9150
底盘 Chassis					
23	轮胎 Tires	前轮 Front	mm	8.25-15-14PR	8.25-15-14PR
24		后轮 Rear	mm	8.25-15-14PR	8.25-15-14PR
25	轮距 Tread	前轮 Front	mm	1470	1470
26		后轮 Rear	mm	1700	1700
27	轴距	Wheelbase		2250	2250
28	最小离地间隙	Min. mast ground clearance		180	180
动力单位与传动 Drive unit&control					
29	蓄电池	Battery	V/AH	2X12/80	2X12/80
30	发动机 Engine	型号 Model		LR4105G59A	6102BG6
31		产地 Manufacturer		China	China
32		额定功率 Rated power	kw/rpm	59/2400	80.9/2500
33		最大扭矩 Maximum torque	N.m/rpm	270/1600	353/1600
34		缸数 No. of cylinders		4	6
35		排量 Displacement	cc	4,33	5,785
36		油箱容量 Fuel tank capacity	L	120	140

因我公司产品持续不断的更新及改进，样本所注参数、技术资料、图片等信息仅作参考，如我公司所注参数修改不另作通知。

Specifications, equipment, technical data, photos and illustrations are based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment