

EH12



● EH12外观图

产品特点

- 操控简单
- 垂直气缸设计，润滑极佳，倾斜操作也十分良好
- 优良的耐用度
- 防震通气结构，加强型铸造机体，减振及耐用性获得极大改善
- 易启动
- 点火系统采用先进的点火定时及减压装置
- 经济、清洁
- 较高的燃油效率，减少了对环境的污染

Product features



Easy operation:
Vertical cylinder design、Excellent lubrication、Good lean operation

Excellent durability:
Shockproof & Ventilation structure、Enhanced casting body、the great improvement of vibration and durability

Easy starting:
The ignition system adopts the advanced ignition timing and pressure-relief device.

Economic and Clean:
Higher fuel efficiency reduces the pollution to the environment.

EH12型规格参数 (Specifications)

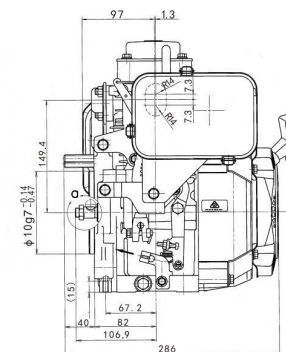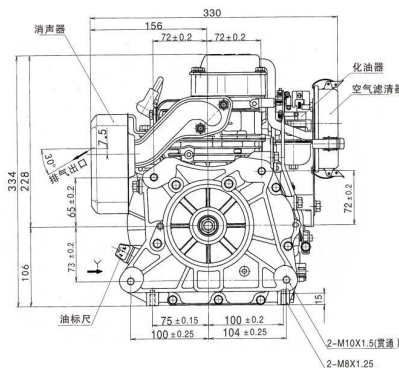

型号Model	EH12
形式 Type	风冷四冲程立式单缸OHV汽油发动机 Air-cooled, 4-cycle, single cylinder OHV gasoline engine
曲轴形式 P.T.O shaft	水平轴 Horizontal
汽缸内径×冲程 Bore×Stroke	mm 60×43
排气量 Displacement	ml 121
额定功率 Continuous output	kW(PS)/rpm 2.1(2.9)/3600
最大功率 Max. output	kW(PS)/rpm 2.9(4.0)/4000
最大扭矩 Max. torque	N·m(kgf·m)/rpm 7.5(0.76)/2600
输出轴旋转方向 Direction of rotation	逆时针方向(面对输出轴端) Counter clockwise as viewed from P.T.O shaft side
使用燃料 Fuel	汽车用无铅汽油 Automobile unleaded gasoline
使用润滑油 Lubricant	发动机机油SE级以上, SAE10W-30 Automobile oil class SE or higher, SAE 10W-30
润滑油容量 Lubricant oil capacity	L 0.6
点火方式 Ignition system	飞轮磁(固态) Flywheel magneto(solid state)
启动方式 Starting system	反冲式 Recoil starter
调速方式 Governor	离心重锤式 Centrifugal flyweight type
化油器 Carburetor	水平浮子式 Float type
净重 Net weight	Kg 15
尺寸 长×宽×高 Dimensions(L×W×H)	mm 286×330×334

