
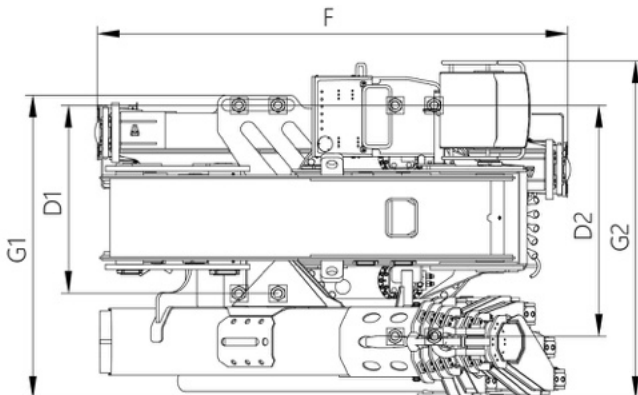
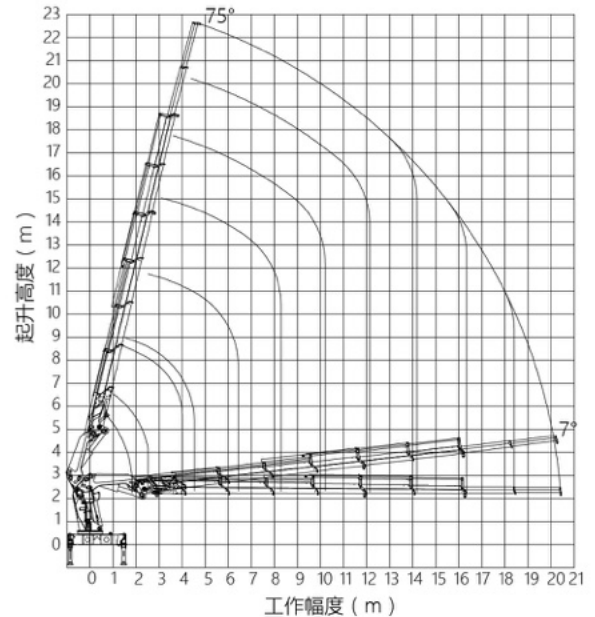


项目	ITEM	单位 Unit	GSQZ760.6	GSQZ760.7	GSQZ760.8
最大起升力矩	Max. lifting moment	kN·m	686	680	674
最大起升质量	Max. lifting capacity	kg	38000	38000	38000
最大液压伸臂长度	Max. hydraulic outreach	m	16.25	18.4	20.55
回转角度	Slewing angle	°	360° continuous	360° continuous	360° continuous
支腿跨距	Stabilizer spread	mm	8206/8000	8206/8000	8206/8000
最大工作压力	Max. operating pressure	MPa	32	32	32
推荐流量	Recommended pump capacity	L/min	80	80	80
油箱容积	Oil tank capacity	L	300	300	300
自重	Dead weight	kg	8200	8530	8735

单位: mm	GSQZ760.6	GSQZ760.7	GSQZ760.8
A	4570-16250	4610-18400	4650-20550
B	2530	2585	2645
C	800-1320/956-1311	800-1320/956-1311	800-1320/956-1311
D1	960	960	960
D2	1180	1180	1180
E	2318-8206/2308-8000	2318-8206/2308-8000	2318-8206/2308-8000
F	2541	2541	2541
G1	1642	1700	1700
G2	1830	1888	1888

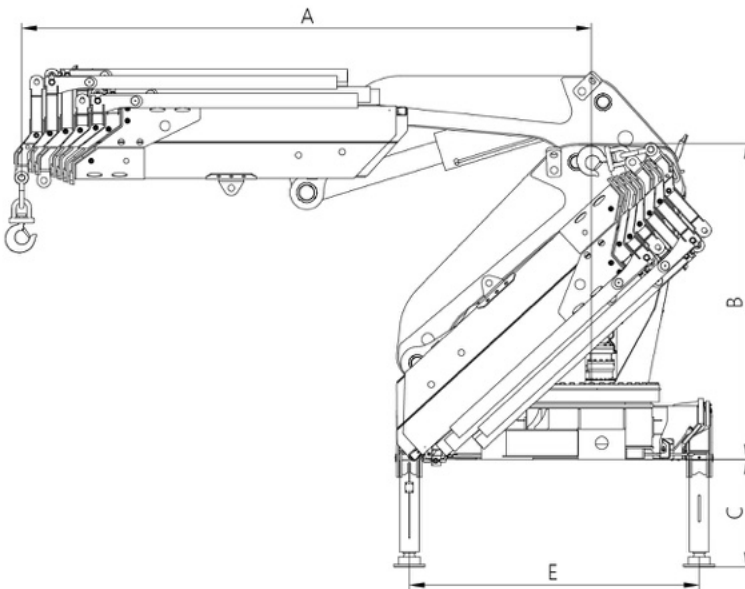

起重性能参数 RATED LIFTING LOAD

GSQZ760.6

幅度(m)	1.80	2.50	4.00	4.57	6.4	8.26	10.16	12.1	14.16	16.25
起重量(kg)	38000	27420	17140	15000	10500	8000	6200	5000	4200	3600

GSQZ760.7

幅度(m)	1.78	2.50	4.00	4.61	6.45	8.31	10.21	12.15	14.21	16.3	18.4
起重量(kg)	38000	27200	17000	14750	10250	7800	6000	4800	4000	3400	2900

GSQZ760.8

幅度(m)	1.76	2.50	4.00	4.65	6.5	8.36	10.26	12.2	14.26	16.35	18.45	20.55
起重量(kg)	38000	26970	16850	14500	10000	7550	5800	4600	3800	3200	2730	2400