


ZOOMLION

ARTICULATING BOOM LIFT

ZA26J

Comply with CE Standard

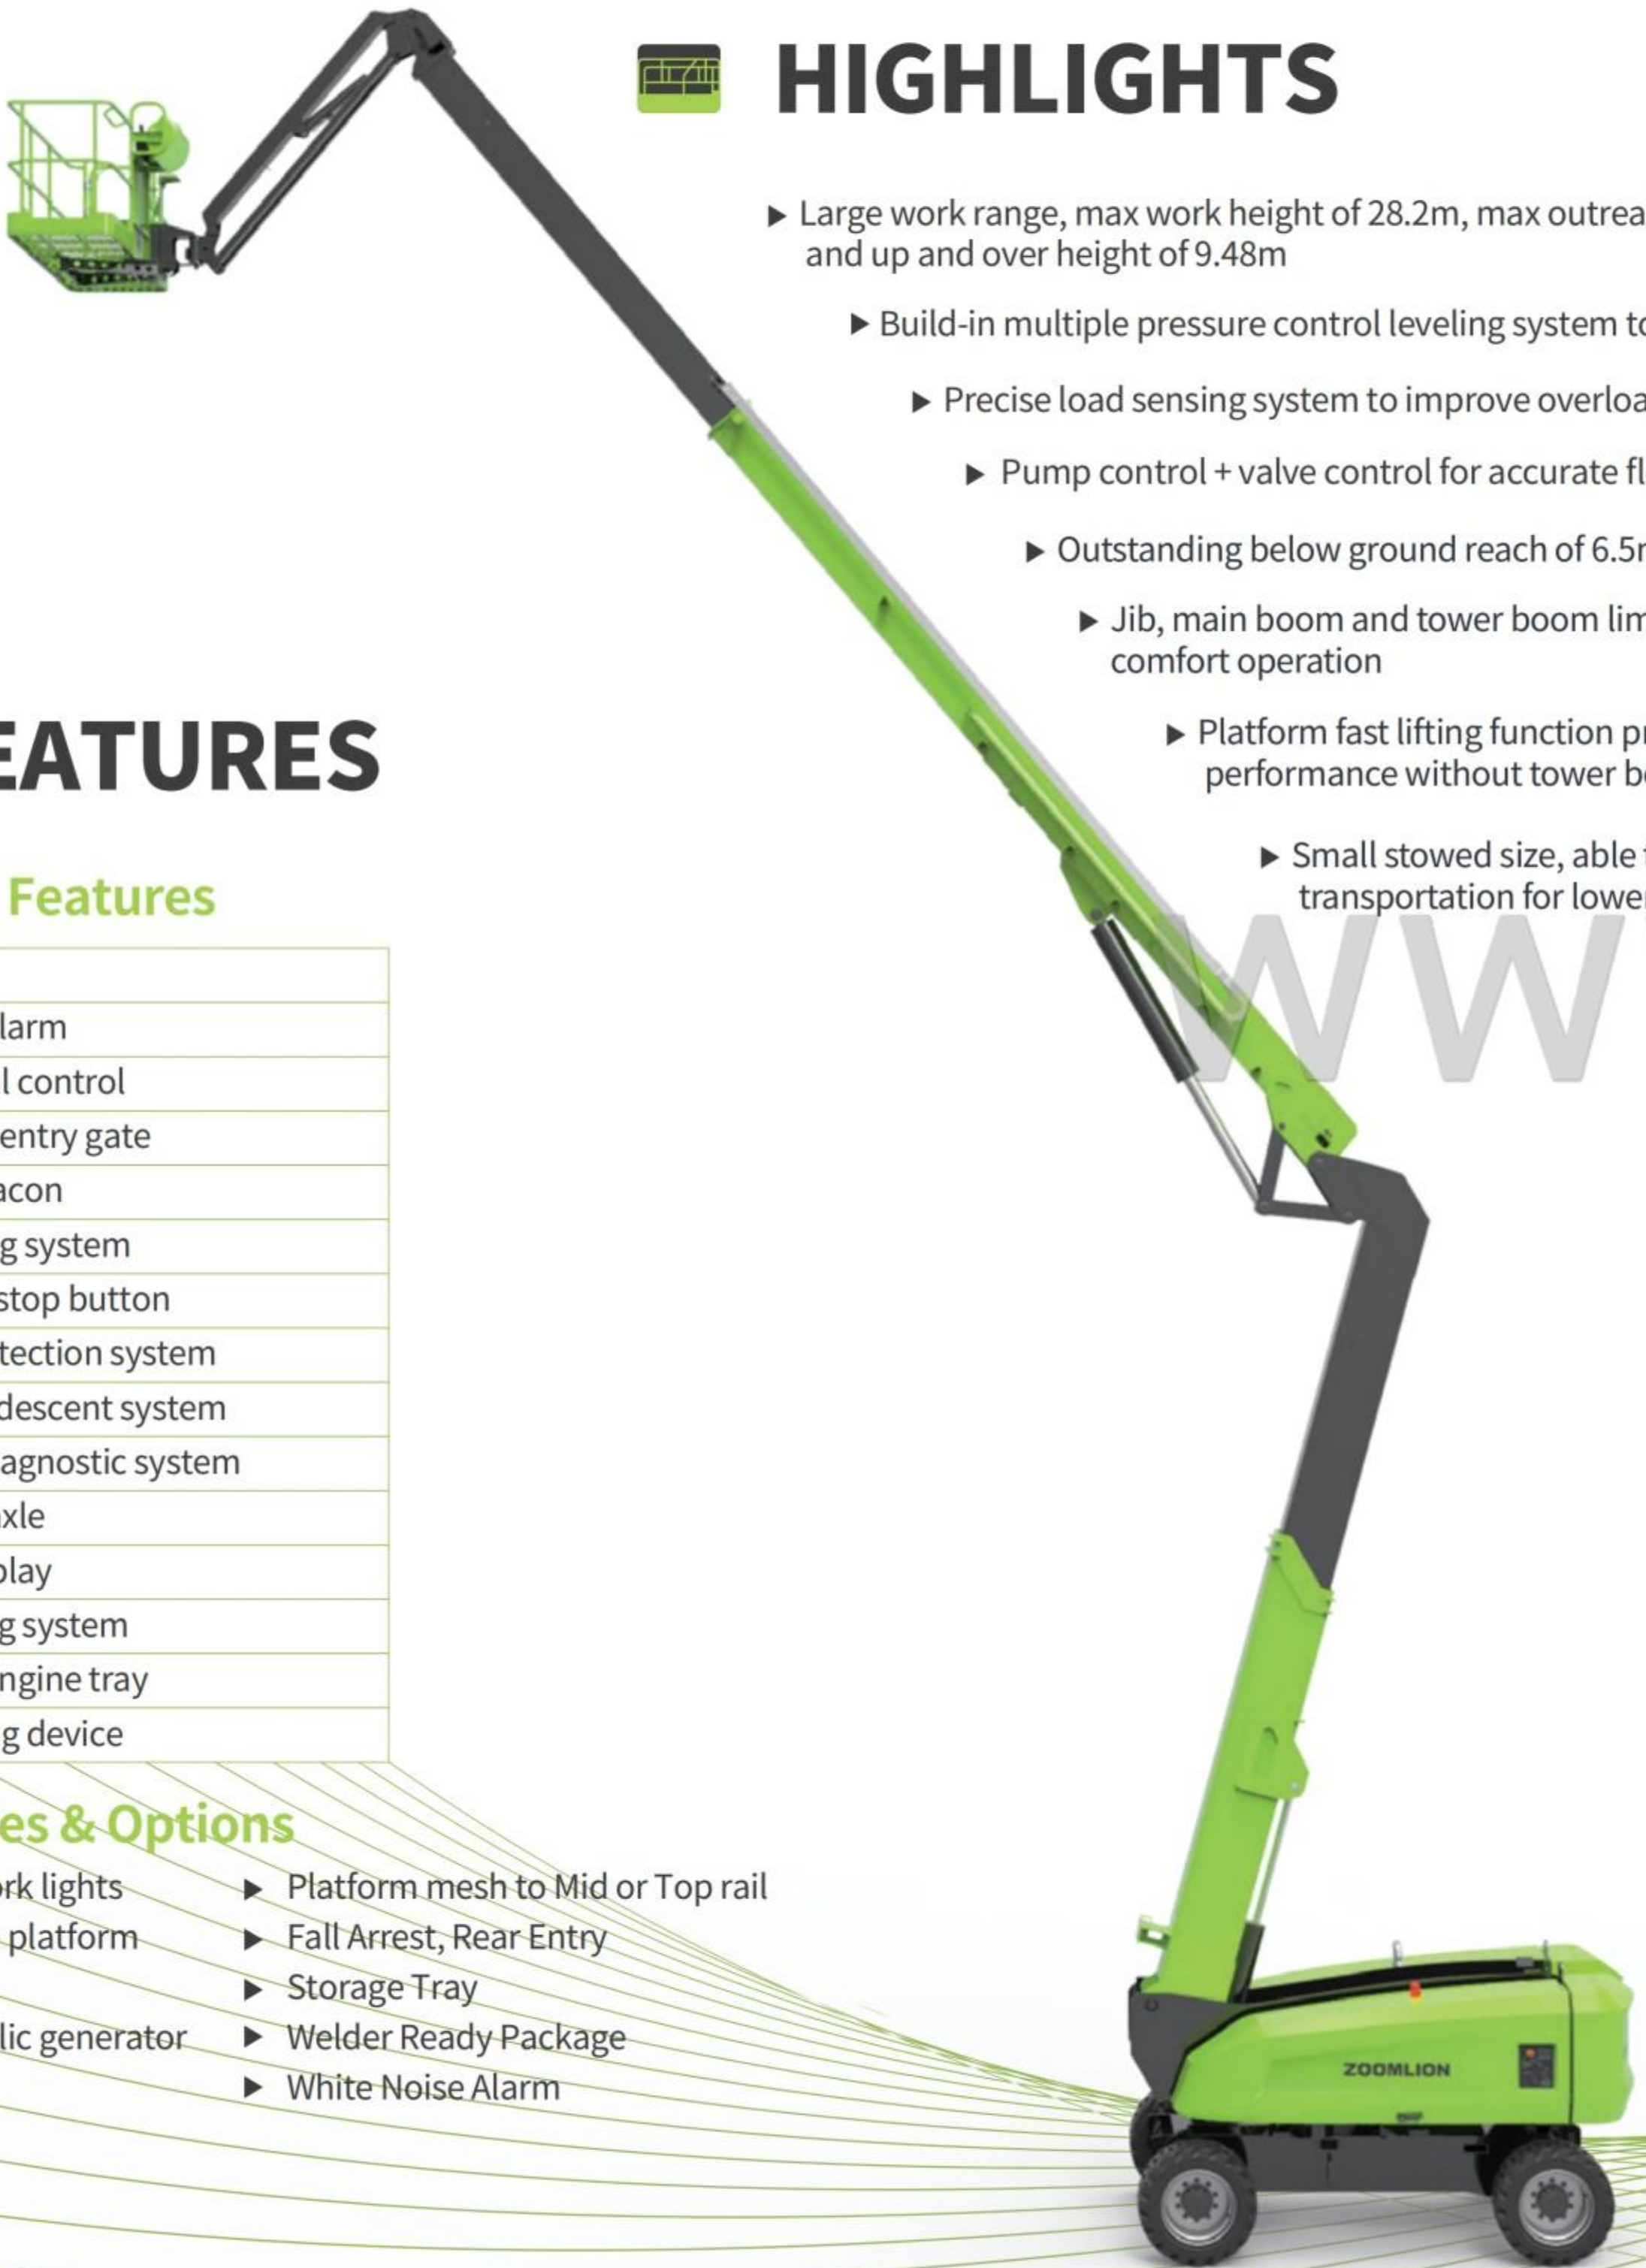

HIGHLIGHTS

- ▶ Large work range, max work height of 28.2m, max outreach of 19.4m, and up and over height of 9.48m
- ▶ Build-in multiple pressure control leveling system to enhance stability
- ▶ Precise load sensing system to improve overload safety operations
- ▶ Pump control + valve control for accurate flow distribution
- ▶ Outstanding below ground reach of 6.5m (16ft 9in)
- ▶ Jib, main boom and tower boom limit position buffer for comfort operation
- ▶ Platform fast lifting function provides high-efficient performance without tower boom operation
- ▶ Small stowed size, able to access container for transportation for lower transporting cost

FEATURES

Standard Features

- Horn
- All motion alarm
- Proportional control
- Self-closing entry gate
- Flashing beacon
- Auto-leveling system
- Emergency stop button
- Over tilt protection system
- Emergency descent system
- On-board diagnostic system
- Oscillating axle
- 4.3' LED display
- Load sensing system
- Swing-out engine tray
- Anti-crushing device

Accessories & Options

- ▶ Platform work lights
- ▶ AC power to platform
- ▶ GPS
- ▶ 8kw Hydraulic generator
- ▶ Platform mesh to Mid or Top rail
- ▶ Fall Arrest, Rear Entry
- ▶ Storage Tray
- ▶ Welder Ready Package
- ▶ White Noise Alarm




ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

ZOOMLION

Model	ZA26J	
	Imperial	Metric
Size		
Work Height	92ft 6in	28.2m
Platform Height	85ft 11in	26.2m
Horizontal Outreach	63ft 8in	19.4m
Up and Over Height	31ft 1in	9.48m
A - Stowed Length	38ft 7in	11.75m
B - Stowed Width	8ft 2in	2.49m
C - Stowed Height	9ft 3in	2.82m
D - Platform Length	8ft	2.44m
E - Platform Width	3ft	0.91m
F - Wheelbase	10ft	3.05m
G - Ground Clearance	1ft 5in	0.42m
Performance		
Platform Capacity	550 lb	250kg
Drive Speed	3.11 mph	5.0km/h
Gradeability	45%(24°)	
Axles Oscillation	8in	0.2m
Turning Radius (Inside)	10ft 4in	3.14m
Turning Radius (Outside)	21ft 3in	6.48m
Turntable Swing	360° continuous	
Platform Rotation	±90°	
H-Tail Swing	4ft 8in	1.422m
Max. Working Slope	5°	
Max. Wind Speed	28mph	12.5m/s
Power		
Diesel Engine	Kubota V2607-CR-TI-EW02 Kubota V3307-DI-T-MAR1-ET02	
Fuel Tank Capacity	39.6 (us gal)	150L
Auxiliary Power	12V	
Control Voltage	12V	
Hydraulic System Capacity	69.5 (us gal)	263L
Hydraulic Tank Capacity	47.6 (us gal)	180L
Tire		
Type	Foam-filled Tires	
Weight		
Gross	41447 lb	18800kg

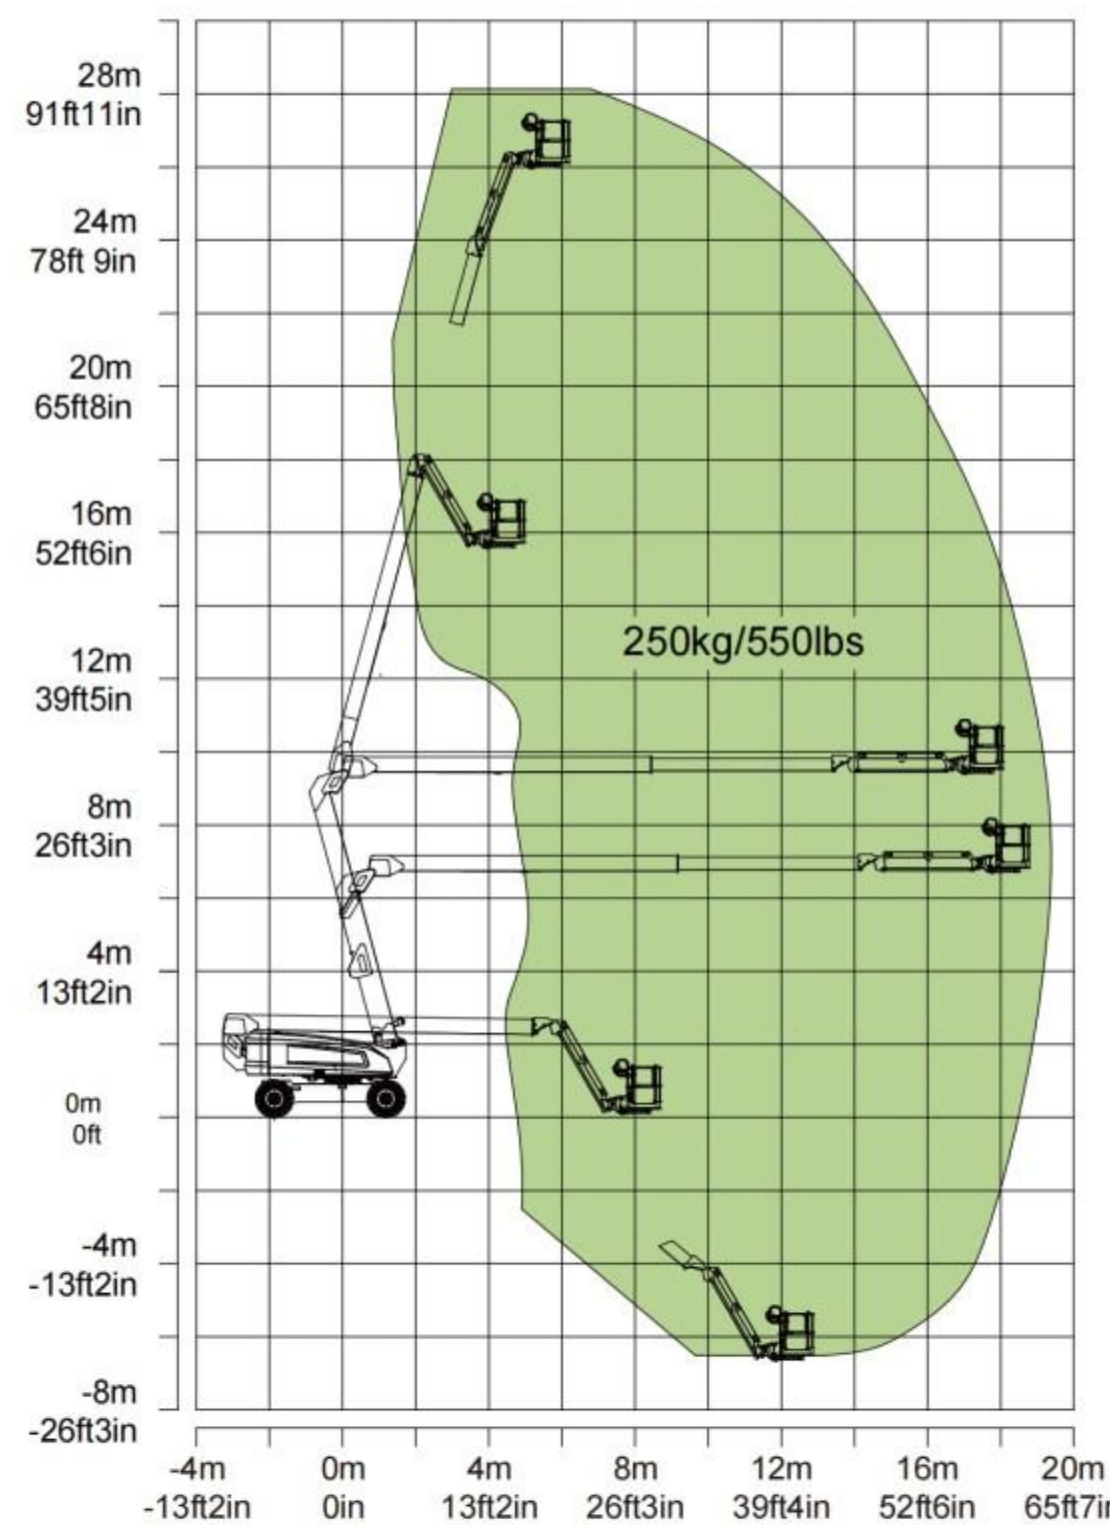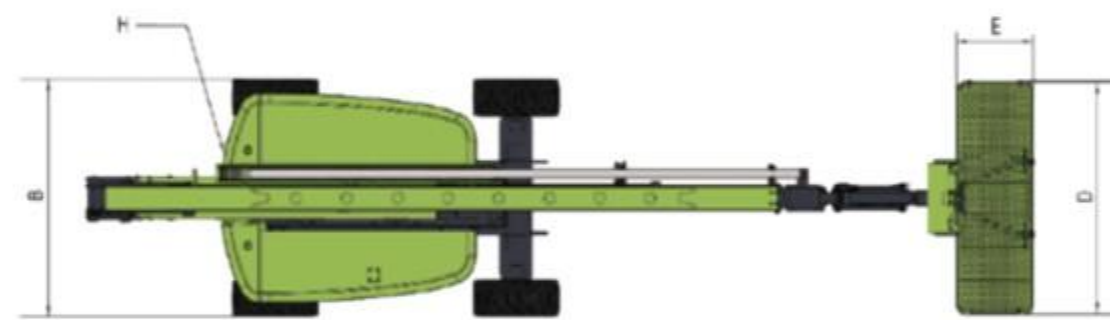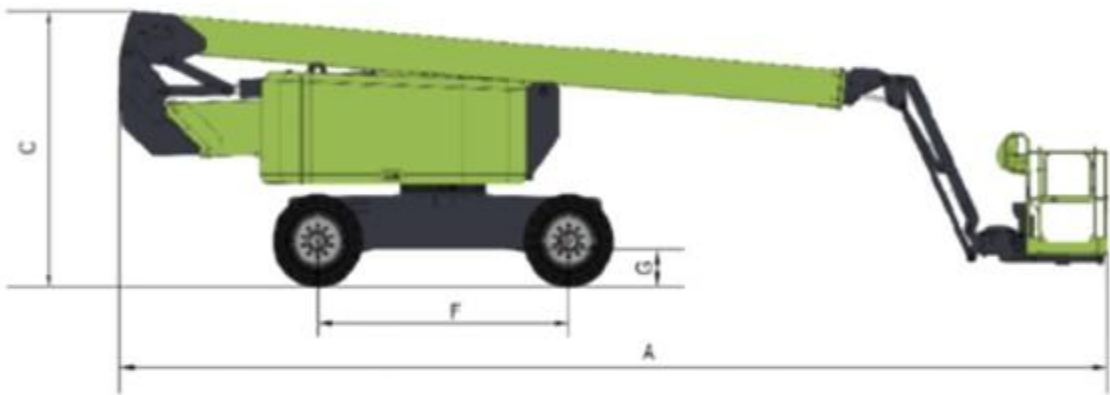

Range of Motion ZA26J

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to May, 2026.